



Interstate Management Program for the
Draft FY2023 STIP for the DVRPC
Pennsylvania Subregion

This Page Intentionally Left Blank

I-95 Reconstruction Project Roadmap

The I-95 Corridor is home to many regional destinations. These destinations include employment centers like Center City Philadelphia, major transportation/port facilities like the Philadelphia International Airport and several port terminals, and sports, recreational, and entertainment venues. The corridor also provides access to portions of New Jersey and Delaware via connections with other Interstates and state routes. This corridor is a limited access facility built in the 1960s, with major sections still under construction in the 1970s and the Girard Point Bridge not opening until the middle of the 1980s.

More than \$2.7 billion has been programmed for PennDOT's long-term, multiphase initiative to rebuild and improve approximately eight miles of I-95 between Interstate 676 and Cottman Avenue north of Center City Philadelphia in Pennsylvania, also known as Sector A. Over the next decade, PennDOT will continue to focus on reconstructing this eight-mile stretch of Interstate 95. The five sections that comprise what is known as "Sector A" (GIR, CPR, BSR, BRI, and AFC) are broken out into more than 40 individual subprojects with separate MPMS#,s, most of which appear in the IMP, and some of which appear in the Regional Highway Program of the DVRPC TIP. As of the publication of the FY2023 TIP, the following sections are currently under construction: the Cottman/Princeton Interchange (CPR), the Betsy Ross Bridge/Aramingo Avenue Interchange (BRI), the Bridge Street Interchange (BSR), from the Frankford Creek, south of the Betsy Ross Interchange, to Allegheny Avenue (AFC), and the Girard Avenue Interchange (GIR). Table 70: on the next page, shows a breakdown of the individual projects and programming amounts in the FY2023 STIP.

PennDOT has a number of projects that are smaller in scope, but significant nonetheless, presently in design or under construction on I-95 in Philadelphia, Bucks County, and Delaware County (Sectors B, C, and D), as well as some that are "off-line", e.g., not on the I-95 mainline, that provide benefit, or are required for I-95 roadway construction improvements in the corridor. There is more work still yet to be added to the region's TIP that will methodically rebuild the entire Interstate over time. As engineers and contractors redesign and rebuild I-95 and its interchanges, planners and community groups are exploring ideas for creative, green, and sustainable ground-level enhancements for those living and working in the neighborhoods along the corridor so that appropriate pedestrian, bicycle, and transit facilities along the corridor may also be expanded, depending on the particular construction section. For example, a major enhancement along the corridor will cap I-95 and Columbus Boulevard near Penn's Landing and will reconnect Center City with the Delaware River Waterfront.

The I-95 corridor in Pennsylvania is a complex network of bridge structures and roadway. Of the approximately 40.7 miles of I-95 in Pennsylvania, 29 percent is located on bridge structures, with the remaining being at-grade roadway. Both assets are quickly deteriorating and in need of major rehabilitation. Some segments are beyond the point of maintenance. Sector A projects pose particular design, construction, and traffic management challenges, given their location within densely populated Philadelphia neighborhoods and their proximity to port facilities, an active major north-south rail line, and the Delaware River waterfront.

Table 70: I-95 FY2023 STIP Funding

SECTOR A	Sections	Subsections	MPMS #	Limits (Project Title)	Amount of Funds Programmed in the FY2023 STIP for PA (\$000)			
					First FY (2023i2026)	Second FY (2027-2030)	Third FY (2031-2034)	Total Amount Programmed
SECTOR A	Cottman-Princeton Interchange (CPR)	CP3	80014	I-95, Utility Relocation and Surface Sts	44,000			44,000
		BSR	47811	I-95: Orthodox to Levick Sts. (Design) also known as the Bridge Street Ramps Section	24,700			24,700
		BS1	79908	I-95: Kennedy Street to Levick Street, and the I-95S off-ramp at the Bridge Street interchange	9,297			9,297
	Levick Street to Bridge Street (BSR)	BS2	79910	I-95: North of Margaret Street to Kennedy Street, and the I-95N on-ramp at the Bridge Street interchange	127,900	110,000		237,900
		BS3	87784	Aramingo Avenue from Duncan Street to Tacony Street; Harbison Avenue from Tacony Street to the Amtrak overpass	7,096		41,000	48,096
		BS5	103563	I-95 Bridge Street Ramps	55,015	48,065	34,642	137,722
	Bridge Street to Betsy Ross Bridge (BRI)	BRI	47812	I-95: Betsy Ross Interchange (Design)	21,000			21,000
		BR2	79904	I-95N: Betsy Ross Interchange (from north side of Wheatshaeaf Lane to north side of Orthodox St. Crossing)	27,626			27,626
		BR3	79905	I-95N & I-95S: Betsy Ross Mainline construction from Wheatshaeaf Lane to I-95 north of Margaret St.	102,000	120,000	65,800	287,800
		BR4	103559	I-95 Betsy Ross Mainline SB	600	190,020		190,620
		BR5	103560	I-95 Betsy Ross Conrail Bridges	3,700	46,000		49,700
		BR6	103561	I-95 Betsy Ross Interchange Drainage		8,100		8,100
	Betsy Ross Bridge to Girard Avenue (AFC)	AFC	47813	I-95: Ann St. to Wheatshaeaf Lane/Frankford Creek (AFC) (Design)	17,000	36,100		53,100
		AF2	79912	I-95: Allegheny Ave. Interchange	8,800			8,800
		AF3	103557	I-95N Ann St. to Wheatshaeaf Lane, Allegheny Ave. South of Frankford Creek	76,100	120,000	36,000	124,100
		AF4	103558	I-95SB Ann St. to Wheatshaeaf Lane		101,560	99,700	201,260
			115687	I-95: Allegheny & Castor Ave Int.	45,000			45,000
	Girard Avenue Interchange (GIR)	GIR	17821	I-95: Shackamaxon - Ann Sts. (Design)	54,000	7,000		61,000
		GR1	79686	I-95: Columbia Ave. to Ann St.	This project has been Let for construction and does not have funds programmed in the FY2023 STIP			
		GR4	79827	I-95S: Columbia Ave. to Ann St. (N)	13,068			13,068
		GR5	79828	I-95: Race to Shackamaxon Sts.	61,582	180,360	85,701	327,643
		GR6	103553	I-95 Race - Shackamaxon 2 Sts.	123,478	120,000	37,522	281,000
		GR8	103555	I-95 Corridor ITS	23,000			23,000
		GR9	103556	I-95 ATMS (GR9)		41,400	36,000	83,554
		95/322-Sector C	15477	I-95/322/Conchester Hwy. Interchange/Impvts. (322)	32,500	85,927		118,427
		95 - SHU	17918	I-95, Transit Improvements/FLEX (Cornwells Heights)	1,322			1,322
		Other I-95 Projects		92581	I-95: Pavement Preservation NB	This project has been Let for construction and does not have funds programmed in the FY2023 STIP		
	46959		I-95 Design Review Manager	8,000	8,000		16,000	
	92289		I-95 Consultant Management	4,000			4,000	
	98207		I-95 Congestion Management	36,400			36,400	
CSXT-Sector C	104343		US 322 over CSX	43,681	4,715		52,396	
CAP	106264		I-95 Central Access Philadelphia/Waterfront Access	328,432			328,432	
	106708		I-95 Planning Assistance	200			200	
	106654		I-95 Transportation Demand Management (TMA)	500			500	
	107709		I-95 Bridge Repairs (95/MB4)	51,000			51,000	
	116391	I-95 Bridge Rehabilitations	15,000	15,000		32,000		
	114876	Studies Line Item	8,000			8,000		
	115805	I-95 Bridge Rehab: Island Ave-Phila Navy Yard	250,000	250,000		500,000		
Total Amount of Funds Programmed in FY2023 STIP/TIP for PA for I-95 Reconstruction in Philadelphia (\$000):								3,456,763

- Blue shading denotes project is currently programmed in the DVRPC Regional Highway Program.
- Orange shading denotes project in the Statewide IMP has been let, and funds for the construction phase have been obligated/encumbered.
- Red shading denotes project in the DVRPC region is currently programmed in the Statewide Interstate Management Program (IMP).

Source: DVRPC, 2022

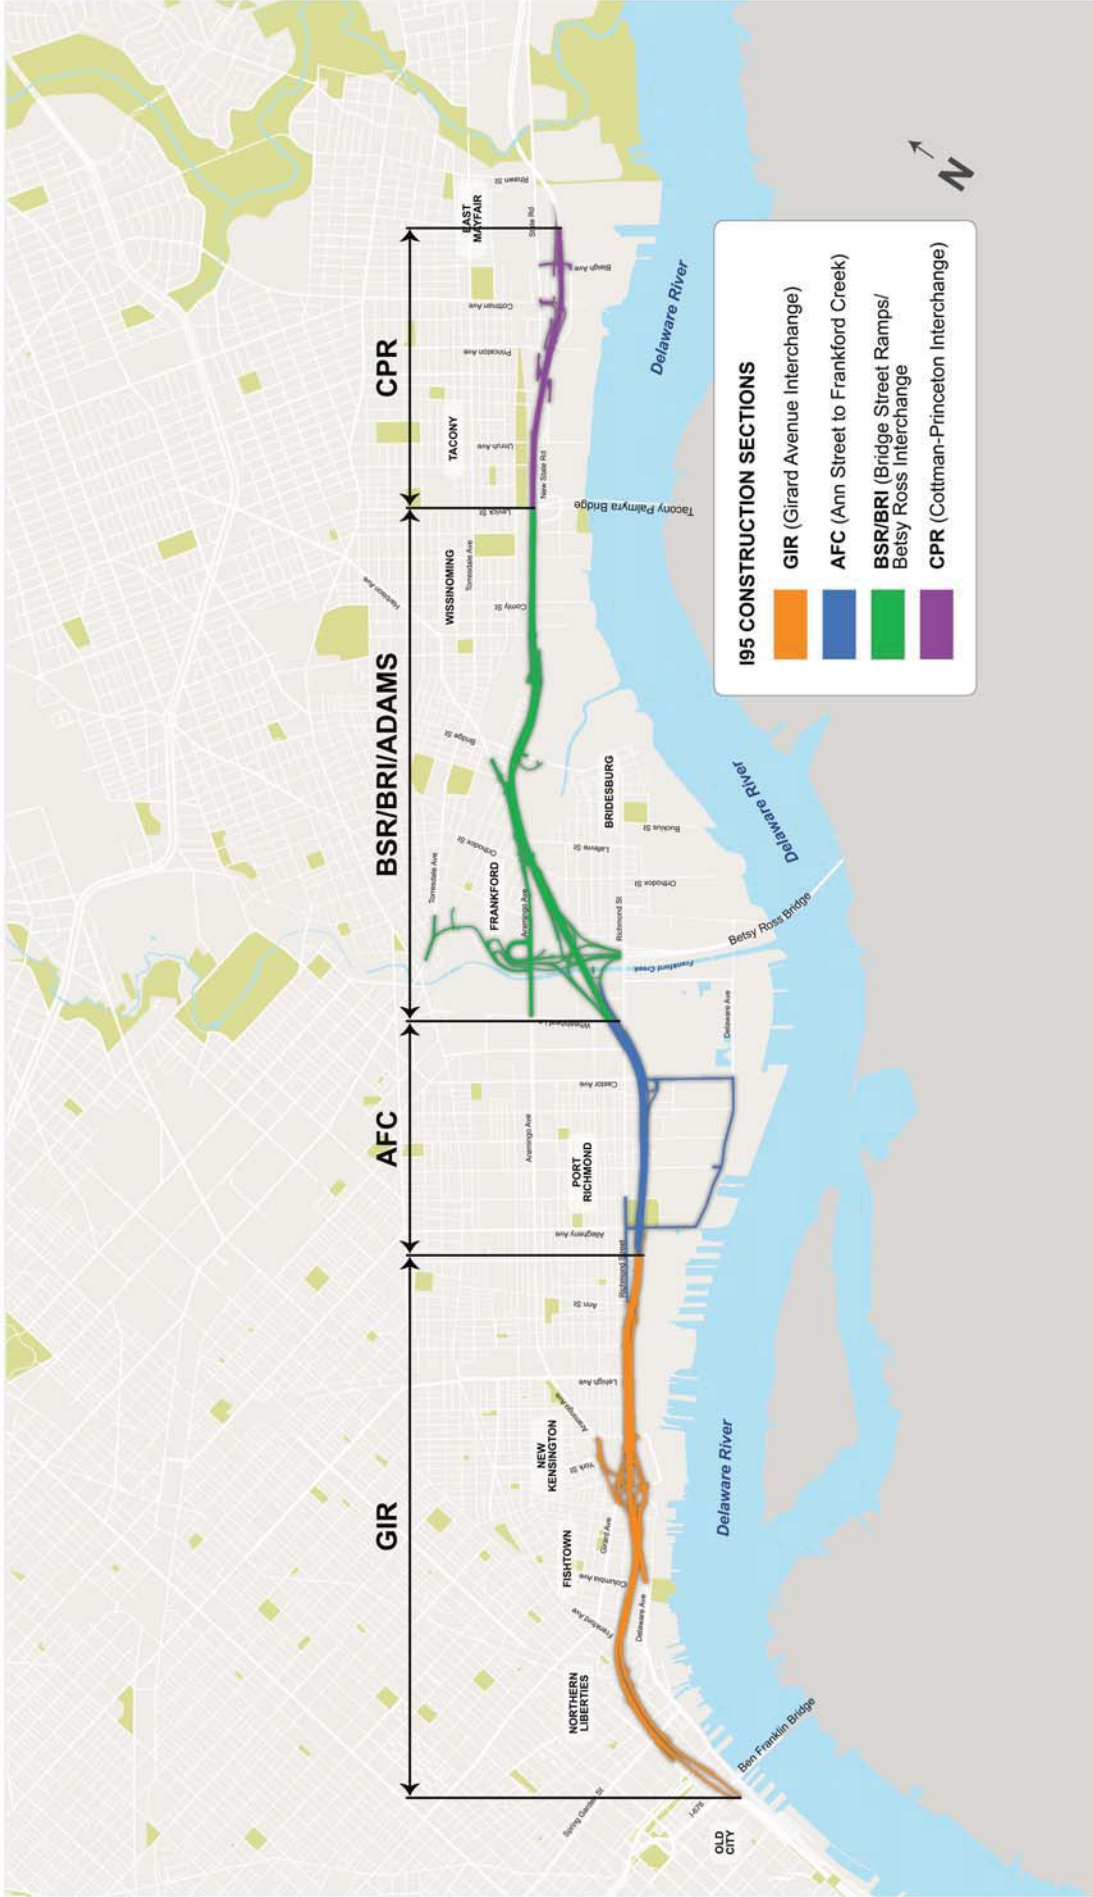


Figure 12: I-95 Sector A Map of Construction Sections

I95 SECTOR A
Map Of Construction Sections

This Page Intentionally Left Blank

DVRPC FY2023-2026 TIP for PA

Final Version

Pennsylvania - Interstate Management Program

Delaware

MPMS# 15477 *I-95/322/Conchester Hwy. Interchange/Impvts. (322) SR:0095*

LIMITS: I-95 at Rt. 322

No Let Date

MUNICIPALITIES: Upper Chichester Township; Chester City; Chester Township

MRPID:115

IMPROVEMENT: Intersection/Interchange Improvements

FC: 11; 14; 16

AQ Code:2035M

PLAN CENTER:

IPD: 22

PROJECT MANAGER: EE/J.Arena

CMP: Major SOV Capacity

CMP Subcorridor(s): 4D, 8A

The SR 95, Section 322 project entails the reconfiguration of the interchange connecting two heavily traveled corridors, I-95 and US 322. The I-95 / US 322 interchange, constructed in the late 1960's, employs poor geometry that includes a left-lane on-ramp requiring a major weave across three high volume lanes of traffic. Limited sight distances, minimal acceleration and deceleration ramp lengths, and roadway segments without shoulders compound the fundamental design problems. Consequently, this area has been recognized as a Physical Highway Bottleneck under the FHWA's Significant Traffic Bottleneck Initiative. There are five existing bridges associated with the interchange: I-95 Southbound over US 322 and Ramp A; I-95 Northbound over Ramp A; Ramp N over US 322 and Ramp A; Highland Avenue over I-95 and Engle Street over I-95. The project will involve the replacement of these structures. Other structures in the project vicinity include culverts carrying waterways under I-95. The project limits along I-95 extend from just south of the US 322 interchange to the Commodore Barry Bridge Off Ramp. The US 322 bridge over CSXT, has been broken out to a separate MPMS#104343, and will be funded under the DVRPC TIP. The project limits along US 322 extend from the interchange with Bethel Road to the I-95 interchange. A point of access study will be prepared which will include an evaluation of providing two direct movements that currently are not provided at the interchange: I-95 NB to US 322 WB and US 322 EB to I-95 SB.

A point of access study will be prepared which will include an evaluation of providing two direct movements that currently are not provided at the interchange: I-95 NB to US 322 WB and US 322 EB to I-95 SB.

Alternatives for the interchange will include providing additional auxiliary lanes on I-95 between Highland Avenue and the Commodore Barry Bridge ramps at I-95. I-95 SB may include the existing three through lanes plus an additional fourth auxiliary lane between ramps. I-95 NB may include the existing three through lanes, the existing auxiliary lane and an additional auxiliary lane. Local roadway improvements are also anticipated for Township Line Road. This section of I-95 has ITS equipment and is a crucial link in PennDOT's Traffic and Incident Management System (TIMS) Program. This project will maintain and improvement upon existing ITS equipment along the I-95 corridor and approaching highways.

This project is integral to the Delaware Valley Freight Corridors Initiative.

TIP Program Years (\$ 000)

Phase	Fund	FY2023	FY2024	FY2025	FY2026	FY2027	FY2028	FY2029	FY2030	FY2031	FY2032	FY2033	FY2034	
PE	581-IM	1,500												
PE	581-IM		1,000											
CON	NHPP-IM				30,000									
CON	NHPP-IM					30,000								
CON	NHPP-IM						30,000							
CON	NHPP-IM							25,927						
		1,500	1,000	0	30,000	30,000	30,000	25,927	0	0	0	0	0	
		Total FY2023-2026			32,500	Total FY2027-2030				85,927	Total FY2031-2034			0

DVRPC FY2023-2026 TIP for PA

Final Version

Pennsylvania - Interstate Management Program

Delaware

MPMS# 104821 I-476 Travel Management

LIMITS: Between PA 3 and I-95

No Let Date

MUNICIPALITIES: Marple Township; Nether Providence Township; Ridley Township; Springfield Township

MRPID:130

IMPROVEMENT: Signal/ITS Improvements

FC:

AQ Code:2030M

PLAN CENTER:

IPD: 26

PROJECT MANAGER: Gannett/V. Genua

CMP: Major SOV Capacity

:MP Subcorridor(s): 2C, 2D, 4D, 5C

This project will provide for the active management of transportation and demand by providing operational improvements on I-476 between the PA 3 and I-95 interchanges, and on I-95 between the I-476 and US 322 interchanges with a series of measures that will allow for the ability to dynamically manage recurrent congestion based on prevailing and predicted traffic conditions through the following: 1) Dynamic lane assignments, shoulder, and junction control improvements--The shoulders will be dynamically controlled along with travel lanes for opening/closing on a temporary basis in response to increasing congestion or incidents; and 3) Adaptive ramp metering will be used to dynamically adjust signals at the ramp entrances to proactively manage vehicle flow from access roads.

		TIP Program Years (\$ 000)												
Phase	Fund	FY2023	FY2024	FY2025	FY2026	FY2027	FY2028	FY2029	FY2030	FY2031	FY2032	FY2033	FY2034	
FD	581-IM			5,100										
ROW	581-IM				300									
UTL	581-IM				200									
CON	NHPP-IM					24,000								
CON	NHPP-IM						24,000							
		0	0	5,100	500	24,000	24,000	0	0	0	0	0	0	
		Total FY2023-2026			5,600	Total FY2027-2030			48,000	Total FY2031-2034				0

Pennsylvania - Interstate Management Program

Delaware

MPMS# 112298 SR 476: I-76 Interchange to MacDade

LIMITS: I-76 Interchange to MacDade Blvd

No Let Date

MUNICIPALITIES: Marple Township; Nether Providence Township; Radnor Township; Ridley Township; Lower Meri

MRPID:TBD

IMPROVEMENT: Roadway Rehabilitation

FC:

AQ Code:S6

PLAN CENTER:

IPD:

PROJECT MANAGER: Plans/S. Hasan

CMP: Not SOV Capacity Adding

1-476 (Mid County Expressway) in Montgomery and Delaware County is a limited access highway in an urbanized setting. The project is located along I-476, between the I-95 (Delaware Expressway) and I-76 (Schuylkill Expressway), within Delaware and Montgomery Counties, in PennDOT District 6-0. It is an Urban Interstate/Freeway classified roadway located within the National Highway System. It is a divided highway, in the NB and SB directions, with two to three lanes in each direction and inside and outside shoulders of varying width. Portions of the highway are separated by concrete median barrier or grade-separated grassed median.

The project is needed because of the deterioration of the existing bituminous overlay which has reached its useful service life within the project limits. Also the current condition of roadside elements such as drainage inlets, guide rail and signs are in poor condition.

The project will include the following work: milling, concrete base repairs, shoulder repairs as needed, bituminous overlay, saw and seal the overlay, minor grade adjustments may be required for inlets, and selective inlets and drain cleaning. Also, all guide rail will be brought up to current standards and the following work will be completed: new pavement markings, the installation of Raised Pavement Markings (RPMs) delineators and rumble strips, and replacement of damaged or missing signs. One Auxiliary Lane will be lengthen as a part of the project but will remain within the existing footprint. It is anticipated that minor bridge work such as deck and barrier repair, will be necessary and determined as the design progresses.

TIP Program Years (\$ 000)

Phase	Fund	FY2023	FY2024	FY2025	FY2026	FY2027	FY2028	FY2029	FY2030	FY2031	FY2032	FY2033	FY2034	
CON	NHPP-IM	10,800												
CON	581-IM	1,200												
CON	NHPP-IM		10,800											
CON	581-IM		1,200											
CON	NHPP-IM			9,700										
CON	581-IM			1,078										
		12,000	12,000	10,778	0	0	0	0	0	0	0	0	0	
		Total FY2023-2026			34,778	Total FY2027-2030				0	Total FY2031-2034			0

DVRPC FY2023-2026 TIP for PA

Pennsylvania - Interstate Management Program

Delaware

MPMS# 116225 I-476 Advance Travel Management

LIMITS: No Let Date

MUNICIPALITIES: Marple Township; Nether Providence Township; Ridley Township; Springfield Township

IMPROVEMENT: Signal/ITS Improvements FC: AQ Code:S7

PLAN CENTER: IPD:

PROJECT MANAGER: Gannett/M. McGuire CMP: Minor SOV Capacity CMP Subcorridor(s): 2C, 2D

This is an advance project on I-476 that will look to provide some traffic relief through the installation of systems and devices for variable speed limits and queue detection prior to the start of the companion project on I-476, MPMS# 104821.

This project will provide for the active management of transportation and demand by providing operational improvements on I-476 between the PA 3 and I-95 interchanges, and on I-95 between the I-476 and US 322 interchanges with a series of measures that will allow for the ability to dynamically manage recurrent congestion based on prevailing and predicted traffic conditions through the installation of systems and devices for variable speed limits and queue detection. Speeds will be dynamically changed based on road, traffic and weather conditions. Warning signs will be used to dynamically display alerts to drivers that congestion and queues are present.

		TIP Program Years (\$ 000)												
Phase	Fund	FY2023	FY2024	FY2025	FY2026	FY2027	FY2028	FY2029	FY2030	FY2031	FY2032	FY2033	FY2034	
UTL	NHPP-IM	150												
CON	NHPP-IM	6,000												
		6,150	0	0	0	0	0	0	0	0	0	0	0	
		Total FY2023-2026			6,150	Total FY2027-2030				0	Total FY2031-2034			0

Total For Delaware	2023	2024	2025	2026	2023-2026	2027-2030	2031-2034
	\$19,650	\$13,000	\$15,878	\$30,500	\$79,028	\$133,927	\$0

DVRPC FY2023-2026 TIP for PA

Final Version

Pennsylvania - Interstate Management Program

Montgomery

MPMS# 106662 I-76 Integrated Corridor Management

LIMITS: PA Turnpike to US 1

No Let Date

MUNICIPALITIES: Upper Merion Township; Lower Merion Township; West Conshohocken Borough

MRPID:132

IMPROVEMENT: Signal/ITS Improvements

FC:

AQ Code:2035M

PLAN CENTER: Metropolitan Subcenter

IPD: 21

PROJECT MANAGER: EE/M. Holva

CMP: Major SOV Capacity

corridor(s): 1A, 2B, 3B, 3C, 8C, 9B

This project will provide for the active management of transportation and demand by providing operational improvements on I-76 and supporting arterials between the PA Turnpike and the US 1 interchanges with a series of measures that will allow for the ability to dynamically manage recurrent congestion based on prevailing and predicted traffic conditions through the following:

- Installation of systems and devices for variable speed limits and queue detection-- Speeds will be dynamically changed based on road, traffic and weather conditions. Warning signs will be used to dynamically display alerts to drivers that congestion and queues are present. The limits for this work are as follows: PA Turnpike to US 1.
- Dynamic lane assignments, shoulder, and junction control improvements-- The shoulders will be dynamically controlled along with travel lanes for opening/closing on a temporary basis in response to increasing congestion or incidents. This work includes reconstruction of shoulders up to current standard width and depth for part time shoulder use, and may necessitate increasing pavement or bridge deck width where insufficient, and lengthening of overhead bridge spans as required. Bridge and roadway drainage and storm water management will be improved as required. It is expected that part time shoulder use will be provided on I-76 in both eastbound and westbound directions from the PA Turnpike to I – 476, and on I-76 westbound from US 1 to Belmont Avenue as it relates to Junction controls for I-76 WB from City Avenue (US 1).
- Adaptive ramp metering will be used to dynamically adjust signals at the ramp entrances to proactively manage vehicle flow from access roads. The Limits are from the PA Turnpike to US 1.
- Installation of systems and devices for continuous monitoring of the transportation network, whether by video or other detectors, to aid in traffic incident management coordination and primary /secondary crash reduction, throughput increases, reducing speed differential in traffic flow and increasing trip reliability. The Limits are PA Turnpike to US 1 and it includes US 202, US 422 and US 1 and access roads.
- Installation of a responsive traffic signal system to be coordinated real time with the Regional Transportation Management Center. This should include the traffic signal system network in the proximity of I-76. Arterial signals will be coordinated with ramp metering. Transit signal priority included where applicable. Installation of communications network as required. The limits include Ridge Pike and PA 23 (Conshohocken to US1) .
- Enhanced coordination of operations with SEPTA on bus or regional rail that is parallel to the I-76 corridor including dynamic messaging on DMS to motorists of available parking / travel times of alternate mode and travel availability .

TIP Program Years (\$ 000)

Phase	Fund	FY2023	FY2024	FY2025	FY2026	FY2027	FY2028	FY2029	FY2030	FY2031	FY2032	FY2033	FY2034	
FD	NHPP-IM	3,500												
FD	NHPP-IM		4,000											
ROW	NHPP-IM			13,659										
UTL	NHPP-IM			9,548										
CON	NHPP-IM				30,000									
CON	NHPP-IM					30,000								
CON	NHPP-IM						30,000							
CON	NHPP-IM							30,000						
CON	NHPP-IM								96,906					
		3,500	4,000	23,207	30,000	30,000	30,000	30,000	96,906	0	0	0	0	
		Total FY2023-2026			60,707	Total FY2027-2030				186,906	Total FY2031-2034			0

Total For Montgomery	2023	2024	2025	2026	2023-2026	2027-2030	2031-2034
	\$3,500	\$4,000	\$23,207	\$30,000	\$60,707	\$186,906	\$0

DVRPC FY2023-2026 TIP for PA

Final Version

Pennsylvania - Interstate Management Program

Philadelphia

MPMS# 17821 I-95: Shackamaxon Street to Ann Street (GIR) - Design SR:0095

LIMITS: Shackamaxon Street to Ann Street

No Let Date

MUNICIPALITIES: Philadelphia City

MRPID:65

IMPROVEMENT: Intersection/Interchange Improvements

FC: 11; 14; 16

AQ Code:2035M

PLAN CENTER: Metropolitan Center

IPD: 21

PROJECT MANAGER: EE/E. Elbich

CMP: Major SOV Capacity

CMP Subcorridor(s): 4B

This project provides for the design of I-95 construction sections GR0 (MPMS# 80094 which has been Let), GR1 (MPMS# 79686 which has been let), GR2 (MPMS# 83640 which has been let), GR3 (MPMS# 79826), GR4 (MPMS# 79827), and GR5 (MPMS# 79828). The construction projects will provide widening and reconstruction of I-95 to eliminate the lane drop (from 3 to 4) in both directions at the Girard Avenue Interchange by providing 4 continuous thru lanes in each direction (Construction Sections GR0 thru GR4). In addition, an auxiliary lane will be provided in each direction to connect the ramps between adjacent interchanges at Vine St and Allegheny Ave. The existing substandard shoulders will be replaced with full width shoulders along most of the project length. Specifically, 22 mainline bridges will be replaced, 4 Girard Ave Interchange ramp bridges will be replaced, 2 arterial road bridges will be replaced or rehabilitated and 4 Conrail bridges over relocated Richmond St will be constructed. The Girard Avenue Interchange will be reconfigured to improve access, operation and safety. Specifically, direct access will also be provided from I-95 SB to Delaware Ave. Additional direct access is being provided from Girard and Delaware Avenues to I-95 SB and from Aramingo Avenue to I-95 NB. No existing interchange movements will be eliminated. Pedestrian, bicycle and transit facilities are present along Delaware Avenue, Richmond Street, Aramingo Avenue and Girard Avenue. The pedestrian and bicycle facilities will be expanded under this project to include wider sidewalks, a shared-use trail and other pathways. Appropriate pedestrian access will be provided via signalized crossings, refuge medians, signing, hand/man signals and visible pavement markings.

Project CMP (Congestion Management Process) commitments include strategies such as improvements for transit users, bicyclists, pedestrians, and drivers on the existing road network (operations). See DVRPC's 2007 and 2010 annual memoranda on supplemental strategies for details related to this project.

This project is integral to the Delaware Valley Freight Corridors Initiative.

An investment of more than \$2.7 billion will provide for the repair, reconstruction and restoration of I-95, a major facility built in the 1960's which runs through Bucks, Philadelphia, and Delaware Counties in the DVRPC region. Current construction efforts in Philadelphia, are addressing critical repairs on aging bridges and interchanges, and improve traffic flow, along the approximately eight miles of I-95 between I-676/Vine Street and Cottman Avenue (Sector A), by adding new ramps and creating a more consistent four-lane highway in both directions by eliminating lane-drops and providing continuous lanes connecting the on-off ramps. Appropriate pedestrian, bicycle, and transit facilities may also be expanded depending on the context of the construction section. The reconstruction of I-95 has been broken out to over 20 separate MPMS #'s, some of which appear in the Interstate Management Program, which is strictly for reconstruction components, and some of which appear in the DVRPC Regional TIP. MPMS #'s include: 17821 (Section GIR design: GR0, GR1, GR2, GR3, GR4, GR5, GR6, GR7), 47394 (Section CPR design: CP1, CP2), 47811 (Section BSR design: BS1, BS2, BS3), 47812 (Section BRI design: BR0, BR2, BR3), 47813 (Section AFC design: AF1, AF2), 79683 (Section CP1 construction), 79685 (Section CP2 construction), 79686 (Section GR1 construction), 79826 (Section GR3 construction), 79827 (Section GR4 construction), 79828 (Section GR5 construction), 79903 (Section BR0 construction), 79904 (Section BR2 construction), 79905 (Section BR3 construction), 79908 (Section BS1 construction), 79910 (Section BS2 construction), 79911 (Section AF1 construction), 79912 (Section AF2 construction), 80094 (Section GR0 construction), 83640 (Section GR2 construction), 87784 (Section BS3 construction), 98207 (I95 Congestion Management), 103553 (Section GR6 Construction), 103554 (Section GR7 construction), 103555 (Section GR8 construction), 102309 (I95 Corridor Drainage). Please refer to the DVRPC I-95 Reconstruction Project in Philadelphia Roadmap in the TIP for additional information about the various sections and corresponding MPMS#'s as well as notations on future and previous projects which may not currently be active and do not appear in the IMP or TIP.

TIP Program Years (\$ 000)

Phase	Fund	FY2023	FY2024	FY2025	FY2026	FY2027	FY2028	FY2029	FY2030	FY2031	FY2032	FY2033	FY2034
PE	NHPP-IM					800							
PE	581-IM					200							
FD	NHPP-IM	14,400											
FD	581-IM	3,600											
FD	NHPP-IM		14,400										
FD	581-IM		3,600										
FD	NHPP-IM			14,400									
FD	581-IM			3,600									
FD	NHPP-IM						2,400						
FD	581-IM						600						
FD	NHPP-IM							2,400					
FD	581-IM							600					

DVRPC FY2023-2026 TIP for PA

Final Version

Pennsylvania - Interstate Management Program

Philadelphia

18,000	18,000	18,000	0	1,000	3,000	3,000	0	0	0	0	0
Total FY2023-2026		54,000		Total FY2027-2030		7,000		Total FY2031-2034		0	

DVRPC FY2023-2026 TIP for PA

Pennsylvania - Interstate Management Program

Philadelphia

MPMS# 46959 I-95 Design Review Manager SR:0095

LIMITS: Race St. to Neshaminy Creek

No Let Date

MUNICIPALITIES: Philadelphia City

MRPID:65

IMPROVEMENT: Other

FC: 11

AQ Code:NRS

PLAN CENTER:

IPD:

PROJECT MANAGER: EE/E. Elbich

CMP: Not SOV Capacity Adding

CMP Subcorridor(s): 4A, 4B

This project will provide assistance to the PennDOT project manager and design review services for the I-95 Reconstruction Projects in the City of Philadelphia. These projects include, but are not limited to, the following sections: Section RVS, GIR, AFC, BRI, BSR, and CPR. The limits of the contract cover the City of Philadelphia. The selected firm will be required to provide engineering management assistance and design review services during the preliminary and final design phases. They will be required to provide sufficient staff to assist the Department in adequately maintaining project coordination and schedule for design through bidding of the construction contracts. Other tasks required include, but are not limited to: review of design submissions, hydraulic reports, type size and location submissions, final bridge plans and computations, geotechnical reports, preliminary and final right of way plans, design plans, special provisions, specification and estimates prepared by other consulting engineering firms. Conduct design review meetings and plan checks; review environmental items of work; coordinate required permit applications; standardize design details, coordinate design and right of way acquisition activities, coordinate all traffic control plans to provide optimum traffic flow, coordinate with the various agencies, public officials, interested groups, communities, and utilities by means of periodic meetings; prepare master timetables to coordinate all phases of the projects; monitor schedule to assure compliance with master schedule; evaluate all value engineering submissions and make recommendations to the District. Tasks also include public involvement, development of project newsletters, environmental permit review and tracking of mitigation strategies, preparation of materials for the project website, assist in preparing applicable inter-agency agreements, and responding to public inquiries both through written and e-mail.

An investment of more than \$2.7 billion will provide for the repair, reconstruction and restoration of I-95, a major facility built in the 1960's which runs through Bucks, Philadelphia, and Delaware Counties in the DVRPC region. Current construction efforts in Philadelphia, are addressing critical repairs on aging bridges and interchanges, and improve traffic flow, along the approximately eight miles of I-95 between I-676/Vine Street and Cottman Avenue (Sector A), by adding new ramps and creating a more consistent four-lane highway in both directions by eliminating lane-drops and providing continuous lanes connecting the on-off ramps. Appropriate pedestrian, bicycle, and transit facilities may also be expanded depending on the context of the construction section. The reconstruction of I-95 has been broken out to over 20 separate MPMS #'s, some of which appear in the Interstate Management Program, which is strictly for reconstruction components, and some of which appear in the DVRPC Regional TIP. MPMS #'s include: 17821 (Section GIR design: GR0, GR1, GR2, GR3, GR4, GR5, GR6, GR7), 47394 (Section CPR design: CP1, CP2), 47811 (Section BSR design: BS1, BS2, BS3), 47812 (Section BRI design:BR0, BR2, BR3), 47813 (Section AFC design: AF1, AF2), 79683 (Section CP1 construction), 79685 (Section CP2 construction), 79686 (Section GR1 construction), 79826 (Section GR3 construction), 79827 (Section GR4 construction), 79828 (Section GR5 construction), 79903 (Section BR0 construction), 79904 (Section BR2 construction), 79905 (Section BR3 construction), 79908 (Section BS1 construction), 79910 (Section BS2 construction), 79911 (Section AF1 construction), 79912 (Section AF2 construction), 80094 (Section GR0 construction), 83640 (Section GR2 construction), 87784 (Section BS3 construction), 98207 (I95 Congestion Management), 103553 (Section GR6 Construction), 103554 (Section GR7 construction), 103555 (Section GR8 construction), 102309 (I95 Corridor Drainage). Please refer to the DVRPC I-95 Reconstruction Project in Philadelphia Roadmap in the TIP for additional information about the various sections and corresponding MPMS#'s as well as notations on future and previous projects which may not currently be active and do not appear in the IMP or TIP.

TIP Program Years (\$ 000)

Phase	Fund	FY2023	FY2024	FY2025	FY2026	FY2027	FY2028	FY2029	FY2030	FY2031	FY2032	FY2033	FY2034
PE	NHPP-IM	1,600											
PE	581-IM	400											
PE	NHPP-IM		1,600										
PE	581-IM		400										
PE	NHPP-IM			1,600									
PE	581-IM			400									
PE	NHPP-IM				1,600								
PE	581-IM				400								
PE	NHPP-IM					1,600							
PE	581-IM					400							
PE	NHPP-IM						1,600						
PE	581-IM						400						
PE	NHPP-IM							1,600					
PE	581-IM							400					

DVRPC FY2023-2026 TIP for PA

Final Version

Pennsylvania - Interstate Management Program

Philadelphia

	2,000	2,000	2,000	2,000	2,000	2,000	2,000	2,000	0	0	0	0
	Total FY2023-2026			8,000	Total FY2027-2030			8,000	Total FY2031-2034			0

Pennsylvania - Interstate Management Program

Philadelphia

MPMS# 47811 **Bridge Street Design (Section BSR)(IMP) SR:0095**

LIMITS: Orthodox Street to Levick Street

No Let Date

MUNICIPALITIES: Philadelphia City

MRPID:65

IMPROVEMENT: Intersection/Interchange Improvements

FC: 11

AQ Code:2035M

PLAN CENTER:

IPD: 21

PROJECT MANAGER: AECOM/P. Shultes

CMP: Major SOV Capacity

CMP Subcorridor(s): 4B

This project is a component of the Statewide Interstate Management Program (IMP) and is the design parent for I-95 Reconstruction SR 0095 Section BSR, also known as the Bridge Street Ramps section.

The overall section improvements of BSR consist of eliminating the lane drop at the James St. ramp in the southbound direction and eliminating the add lane (i.e. providing four lanes northbound from the BRI section up to Bridge Street) at the Bridge St. on-ramp in the northbound direction. The proposed SR 0095 will have four lanes in each direction from Margaret St. to Levick St. with exclusive acceleration/deceleration lanes. The project includes the replacement of six mainline structures. All retaining walls supporting SR 0095 will be totally reconstructed to support the new widened roadway and ramps. In addition, the project consists of 1.7 miles of reconstruction and realignment along SR 0095, as well as 0.7 miles of reconstruction along Tacony Street from Aramingo Ave. to the Delaware Ave. Extension to the east. Approximately 1.4 miles of reconstruction along Aramingo Ave. is anticipated from Wheatshaeaf La. to the south to the Amtrak bridge to the north. A portion of Aramingo Ave. will also be widened from Orthodox St. to Tacony St. along the SR 0095 side of Aramingo Ave. The Aramingo Avenue/Betsy Ross Interchange will be reconfigured to construct a portion of the Adams Ave. Connector to intersect Aramingo Ave. adjacent to the Frankford Creek Bridge. Additional ramps will be constructed between the Betsy Ross Bridge and the SR 0095/Aramingo Ave. Interchange to accommodate all traffic movements from the Betsy Ross Bridge and from SR 0095 (MPMS 79903 - SR0095, Sec BR0). These new ramps will serve to accommodate the increased traffic volumes from the removal of two ramps at the Bridge St. Interchange. One of the ramps to be removed is an off-ramp from SR 0095 NB to Aramingo Ave. NB. The other ramp to be removed is an on-ramp from Aramingo Ave. SB to SR 0095 SB.

As part of this project, Delaware Ave. will be extended approximately 1.3 miles from Buckius Street to Tacony St. This will include a new bridge over Old Frankford Creek. The project also consists of removing the SR 0095 SB off-ramp at the Bridge St. Interchange (at James Street), and the removal of the Bridge St. on-ramp to SR 0095 NB. These ramps are being moved further north to the intersection of Tacony St. and the Delaware Ave. Extension. A SR 0095 SB off-ramp will provide direct access to Tacony St. and the Delaware Ave. Extension. A new on-ramp from Tacony St. and the Delaware Ave. Extension will provide access to SR 0095 NB.

The BSR section also includes the construction of the Frankford Creek Greenway along Aramingo Ave. from Wheatshaeaf La. To the Adams Ave. Connector, and then along the Adams Ave. Connector to the adjoining MPMS #17782 project. A multi-use trail will extend further along Aramingo Ave. from the Adams Ave. Connector to the existing bicycle lanes on Orthodox St. and Margaret St. The East Coast Greenway will also be constructed along the North Delaware Ave. Extension to connect with the K&T Trail. The project will incorporate new traffic signals at 12 intersections and modifications to traffic signals at 5 intersections.

An investment of more than \$2.7 billion will provide for the repair, reconstruction and restoration of I-95, a major facility built in the 1960's which runs through Bucks, Philadelphia, and Delaware Counties in the DVRPC region. Current construction efforts in Philadelphia, are addressing critical repairs on aging bridges and interchanges, and improve traffic flow, along the approximately eight miles of I-95 between I-676/Vine Street and Cottman Avenue (Sector A), by adding new ramps and creating a more consistent four-lane highway in both directions by eliminating lane-drops and providing continuous lanes connecting the on-off ramps. Appropriate pedestrian, bicycle, and transit facilities may also be expanded depending on the context of the construction section. The reconstruction of I-95 has been broken out to over 20 separate MPMS #'s, some of which appear in the Interstate Management Program, which is strictly for reconstruction components, and some of which appear in the DVRPC Regional TIP. MPMS #'s include: 17821 (Section GIR design: GR0, GR1, GR2, GR3, GR4, GR5, GR6, GR7), 47394 (Section CPR design: CP1, CP2), 47811 (Section BSR design: BS1, BS2, BS3), 47812 (Section BRI design:BR0, BR2, BR3), 47813 (Section AFC design: AF1, AF2), 79683 (Section CP1 construction), 79685 (Section CP2 construction), 79686 (Section GR1 construction), 79826 (Section GR3 construction), 79827 (Section GR4 construction), 79828 (Section GR5 construction), 79903 (Section BR0 construction), 79904 (Section BR2 construction), 79905 (Section BR3 construction), 79908 (Section BS1 construction), 79910 (Section BS2 construction), 79911 (Section AF1 construction), 79912 (Section AF2 construction), 80094 (Section GR0 construction), 83640 (Section GR2 construction), 87784 (Section BS3 construction), 98207 (I95 Congestion Management), 103553 (Section GR6 Construction), 103554 (Section GR7 construction), 103555 (Section GR8 construction), 102309 (I95 Corridor Drainage). Please refer to the DVRPC I-95 Reconstruction Project in Philadelphia Roadmap in the TIP for additional information about the various sections and corresponding MPMS#'s as well as notations on future and previous projects which may not currently be active and do not appear in the IMP or TIP.

This project is integral to the Delaware Valley Freight Corridors Initiative. Project CMP (Congestion Management Process) commitments include strategies such as improvements for transit users, bicyclists, pedestrians, and drivers on the existing road network (operations). See DVRPC's 2007 and 2010 annual memoranda on supplemental CMP strategies for details related to this project. Related sections of I-95 Reconstruction: MPMS #'s 47811, 79908, 79910, 87784, 103562, 103563 and 103564.

DVRPC FY2023-2026 TIP for PA

Pennsylvania - Interstate Management Program

Philadelphia

TIP Program Years (\$ 000)

Phase	Fund	FY2023	FY2024	FY2025	FY2026	FY2027	FY2028	FY2029	FY2030	FY2031	FY2032	FY2033	FY2034	
FD	NHPP-IM	4,500												
FD	581-IM	500												
FD	NHPP-IM		4,500											
FD	581-IM		500											
FD	NHPP-IM			10,170										
FD	581-IM			1,130										
ROW	NHPP-IM		1,260											
ROW	581-IM		140											
ROW	NHPP-IM			900										
ROW	581-IM			100										
ROW	NHPP-IM				900									
ROW	581-IM				100									
		5,000	6,400	12,300	1,000	0	0	0	0	0	0	0	0	
		Total FY2023-2026		24,700		Total FY2027-2030				0	Total FY2031-2034			0

Pennsylvania - Interstate Management Program

Philadelphia

MPMS# 47812 I-95: Betsy Ross Interchange (BRI) - Design (IMP) SR:0095

LIMITS: Wheatsheaf Lane to Orthodox Street

No Let Date

MUNICIPALITIES: Philadelphia City

MRPID:65

IMPROVEMENT: Intersection/Interchange Improvements

FC: 11

AQ Code:2035M

PLAN CENTER:

IPD: 20

PROJECT MANAGER: AECOM/P. Shultes

CMP: Major SOV Capacity

CMP Subcorridor(s): 4B

This project is a component of the Statewide Interstate Management Program (IMP) and is the design parent of I-95 Reconstruction SR 0095 Section BRI, also known as the Betsy Ross Interchange.

The overall section consists of reconstructing 1.1 miles of the SR 0095 mainline roadway starting from the north side of the Wheatsheaf Lane crossing, adjoining Section AFC, and ending at Orthodox Street, adjoining Section BSR. The lane drops (from 4 to 3) on SR 0095 northbound and southbound will be eliminated from the Betsy Ross Interchange. Within Section BRI, the multi-lane NB and SB collector-distributor roads, the Ramp X SB on ramp and Ramp Y NB off ramp will be demolished and removed. The proposed SR 0095 mainline will have four lanes in each direction from Wheatsheaf Lane to the Orthodox Street/Pearce Street crossing. On the SR 0095 mainline, the project includes reconstruction of three dual structures (the dual structures over Frankford Creek; the dual viaduct structures over the Earth Fill area from the Betsy Ross Interchange to south of Orthodox Street crossing; and the dual structures over Orthodox and Pearce Streets). Section BRI includes the rehabilitation or replacement of the Conrail Shared Assets railroad bridges crossing SR 0095 and Ramps A and C.

In addition, the Aramingo Avenue/Betsy Ross Interchange will be reconfigured to realign the planned Adams Avenue Connector to intersect Aramingo Avenue adjacent to the Frankford Creek Bridge and to accommodate increased traffic volumes from the removal of the Bridge Street Interchange. In the Betsy Ross Interchange area, Section BRI also includes reconstruction of nine connecting bridge structure ramps (Ramp A from SR 0095 NB to Betsy Ross Bridge; Ramp B from Betsy Ross Bridge to SR 0095 SB; Ramp C from SR 0095 NB to Aramingo Avenue; Ramp D from Adams Avenue Connector to SR 0095 SB; Ramp EE from SR 0095 SB to Betsy Ross Bridge; Ramp F from SR 0095 SB to Aramingo Avenue; Ramp G from Aramingo Avenue to NB; Ramp H from Betsy Ross Bridge to NB; Ramp GH from Aramingo Avenue and Betsy Ross Bridge to NB; . Also, the missing connection from the Betsy Ross Bridge to Aramingo Avenue/Adams Avenue Connector will be built (Ramp I), and the missing connection from Aramingo Avenue/Adams Avenue Connector to the Betsy Ross Bridge will be built (Ramp JJ).

This project is funded by a portion of a \$51,254,972 TEA-21 Earmark (PA ID# 228/FED ID# 1847)

An investment of more than \$2.7 billion will provide for the repair, reconstruction and restoration of I-95, a major facility built in the 1960's which runs through Bucks, Philadelphia, and Delaware Counties in the DVRPC region. Current construction efforts in Philadelphia, are addressing critical repairs on aging bridges and interchanges, and improve traffic flow, along the approximately eight miles of I-95 between I-676/Vine Street and Cottman Avenue (Sector A), by adding new ramps and creating a more consistent four-lane highway in both directions by eliminating lane-drops and providing continuous lanes connecting the on-off ramps. Appropriate pedestrian, bicycle, and transit facilities may also be expanded depending on the context of the construction section. The reconstruction of I-95 has been broken out to over 20 separate MPMS #'s, some of which appear in the Interstate Management Program, which is strictly for reconstruction components, and some of which appear in the DVRPC Regional TIP. MPMS #'s include: 17821 (Section GIR design: GR0, GR1, GR2, GR3, GR4, GR5, GR6, GR7), 47394 (Section CPR design: CP1, CP2), 47811 (Section BSR design: BS1, BS2, BS3), 47812 (Section BRI design:BR0, BR2, BR3), 47813 (Section AFC design: AF1, AF2), 79683 (Section CP1 construction), 79685 (Section CP2 construction), 79686 (Section GR1 construction), 79826 (Section GR3 construction), 79827 (Section GR4 construction), 79828 (Section GR5 construction), 79903 (Section BR0 construction), 79904 (Section BR2 construction), 79905 (Section BR3 construction), 79908 (Section BS1 construction), 79910 (Section BS2 construction), 79911 (Section AF1 construction), 79912 (Section AF2 construction), 80094 (Section GR0 construction), 83640 (Section GR2 construction), 87784 (Section BS3 construction), 98207 (I95 Congestion Management), 103553 (Section GR6 Construction), 103554 (Section GR7 construction), 103555 (Section GR8 construction), 102309 (I95 Corridor Drainage). Please refer to the DVRPC I-95 Reconstruction Project in Philadelphia Roadmap in the TIP for additional information about the various sections and corresponding MPMS#'s as well as notations on future and previous projects which may not currently be active and do not appear in the IMP or TIP.

This project is integral to the Delaware Valley Freight Corridors Initiative. Project CMP (Congestion Management Process) commitments include strategies such as improvements for transit users, bicyclists, pedestrians, and drivers on the existing road network (operations). See DVRPC's 2007 and 2010 annual memoranda on supplemental CMP strategies for details related to this project. Related sections of I-95 Reconstruction: MPMS #'s 47812, 79903, 79904, 79905, 103559, 103560 and 103561.

		TIP Program Years (\$ 000)											
Phase	Fund	FY2023	FY2024	FY2025	FY2026	FY2027	FY2028	FY2029	FY2030	FY2031	FY2032	FY2033	FY2034
FD	NHPP-IM	5,600											
FD	581-IM	1,400											
FD	NHPP-IM		5,600										
FD	581-IM		1,400										
FD	NHPP-IM			5,600									

DVRPC FY2023-2026 TIP for PA

Final Version

Pennsylvania - Interstate Management Program

Philadelphia

FD	581-IM	1,400												
		7,000	7,000	7,000	0	0	0	0	0	0	0	0	0	
		Total FY2023-2026		21,000		Total FY2027-2030			0		Total FY2031-2034			0

Pennsylvania - Interstate Management Program

Philadelphia

MPMS# 47813 *I-95: Ann Street to Wearsheaf Lane (AFC) SR:0095*

LIMITS: Ann St. to Wearsheaf Lane

No Let Date

MUNICIPALITIES: Philadelphia City

MRPID:65

IMPROVEMENT: Intersection/Interchange Improvements

FC: 11

AQ Code:2035M

PLAN CENTER:

IPD: 20

PROJECT MANAGER: CH2MHill/P. Conti

CMP: Major SOV Capacity

CMP Subcorridor(s): 4B

This project is a component of the Statewide Interstate Management Program (IMP) and is the AFC Design Parent.

This project is the design parent of I-95 Reconstruction SR 0095 Section AFC, also known as the Ann to Frankford Creek section. The overall section improvements consist of replacing 12 bridges and 0.8 miles of roadway. The limits of this project extend along I-95 from the bridge over Ann Street. to the bridge over Wearsheaf Lane for a length of approximately 1.3 miles. I-95, Section AFC will involve consolidating existing disjointed interchanges at Allegheny Avenue, Westmoreland Street, and Castor Avenue which will be reconfigured into two half interchanges: half-diamond interchange at Allegheny Avenue for Southbound I-95 and a partial clover interchange at Castor Avenue for Northbound I-95.

The existing off-ramp at Westmoreland Street will be removed, leaving a half-diamond interchange at Allegheny Avenue for I-95 Southbound. A new northbound on-ramp will be added Castor Avenue to create a partial-clover interchange at Castor Avenue for I-95 Northbound. The existing loop-ramp will be split to provide both access to I-95 Northbound and the Betsy Ross Bridge which will provide direct access to the Betsy Ross Bridge from NB I-95

Existing I-95 has 4 lanes northbound and 4 lanes southbound. The proposed I-95 will have an auxiliary lane Southbound, between the Betsy Ross on-ramp and the off-ramp at Allegheny Avenue, and an auxiliary lane Northbound between the Girard Interchange and the off-ramp to the Betsy Ross bridge.

Complete reconstruction and widening of the existing pavement. Reconstruction or replacement of all existing bridges. Extend viaduct over playground from Westmoreland Street to Allegheny Avenue. Rehabilitate existing structure from Westmoreland Street to Tioga Street.

The four existing ramps (two at Allegheny, one at Westmoreland, and one at Castor) are all single lane ramps. The two ramps at Allegheny, and the two ramps at Castor will be single lane ramps, except at the termini of the off-ramps where they will be widened to two lanes at signalized intersections.

PennDOT will utilize four construction contracts to rebuild and improve the 1.3 miles this portion of I-95: AF1(79911), AF2(79912), AF3(103557) and AF4(103558).

An investment of more than \$2.7 billion will provide for the repair, reconstruction and restoration of I-95, a major facility built in the 1960's which runs through Bucks, Philadelphia, and Delaware Counties in the DVRPC region. Current construction efforts in Philadelphia, are addressing critical repairs on aging bridges and interchanges, and improve traffic flow, along the approximately eight miles of I-95 between I-676/Vine Street and Cottman Avenue (Sector A), by adding new ramps and creating a more consistent four-lane highway in both directions by eliminating lane-drops and providing continuous lanes connecting the on-off ramps. Appropriate pedestrian, bicycle, and transit facilities may also be expanded depending on the context of the construction section. The reconstruction of I-95 has been broken out to over 20 separate MPMS #'s, some of which appear in the Interstate Management Program, which is strictly for reconstruction components, and some of which appear in the DVRPC Regional TIP. MPMS #'s include: 17821 (Section GIR design: GR0, GR1, GR2, GR3, GR4, GR5, GR6, GR7), 47394 (Section CPR design: CP1, CP2), 47811 (Section BSR design: BS1, BS2, BS3), 47812 (Section BRI design:BR0, BR2, BR3), 47813 (Section AFC design: AF1, AF2), 79683 (Section CP1 construction), 79685 (Section CP2 construction), 79686 (Section GR1 construction), 79826 (Section GR3 construction), 79827 (Section GR4 construction), 79828 (Section GR5 construction), 79903 (Section BR0 construction), 79904 (Section BR2 construction), 79905 (Section BR3 construction), 79908 (Section BS1 construction), 79910 (Section BS2 construction), 79911 (Section AF1 construction), 79912 (Section AF2 construction), 80094 (Section GR0 construction), 83640 (Section GR2 construction), 87784 (Section BS3 construction), 98207 (I95 Congestion Management), 103553 (Section GR6 Construction), 103554 (Section GR7 construction), 103555 (Section GR8 construction), 102309 (I95 Corridor Drainage). Please refer to the DVRPC I-95 Reconstruction Project in Philadelphia Roadmap in the TIP for additional information about the various sections and corresponding MPMS#'s as well as notations on future and previous projects which may not currently be active and do not appear in the IMP or TIP.

This project is integral to the Delaware Valley Freight Corridors Initiative. Project CMP (Congestion Management Process) commitments include strategies such as improvements for transit users, bicyclists, pedestrians, and drivers on the existing road network (operations). See DVRPC's 2007 and 2010 annual memoranda on supplemental CMP strategies for details related to this project. A final alternative for bridge rehabilitation or replacement is determined upon federal National Environmental Policy Act (NEPA) or state Categorical Exclusion clearance. Related sections of I-95 Reconstruction: MPMS #'s 47813, 79911, and 79912.

TIP Program Years (\$ 000)

Phase	Fund	FY2023	FY2024	FY2025	FY2026	FY2027	FY2028	FY2029	FY2030	FY2031	FY2032	FY2033	FY2034
FD	581-IM	2,000											

DVRPC FY2023-2026 TIP for PA

Pennsylvania - Interstate Management Program

Philadelphia

FD	185-IM	6,000											
FD	581-IM		2,000										
FD	185-IM		6,000										
FD	581-IM			2,000									
FD	185-IM			6,000									
FD	581-IM				2,000								
FD	185-IM				6,000								
		8,000	8,000	8,000	8,000	0	0	0	0	0	0	0	0
		Total FY2023-2026	32,000	Total FY2027-2030				0	Total FY2031-2034				0

Pennsylvania - Interstate Management Program

Philadelphia

MPMS# 79827 **I-95 Southbound: Columbia-Ann St N (GR4)**

LIMITS: Columbia to north of Ann Street

No Let Date

MUNICIPALITIES: Philadelphia City

MRPID:65

IMPROVEMENT: Intersection/Interchange Improvements

FC: 11; 14

AQ Code:2025M

PLAN CENTER:

IPD: 21

PROJECT MANAGER: CONSTR

CMP: Major SOV Capacity

CMP Subcorridor(s): 4B

This project is a component of the Statewide Interstate Management Program (IMP). This construction contract will include reconstruction and widening of I-95 southbound to include 4 thru lanes plus a fifth auxiliary lane (12'-0" lane widths) from Columbia Avenue to north of Ann Street in multiple stages. The existing standard shoulder widths (varies up to 10'-0") will be replaced with full width shoulders (varies up to 12'-0"). This contract will include reconstruction of the southbound Girard Avenue Interchange ramps (Ramps B, B Spur and D). This phase will include demolition and replacement of numerous bridge structures, including I-95 SB over Girard Avenue to Ann Street; I-95 SB over Aramingo Avenue to south of Girard Avenue; I-95 SB over Berks Street; I-95 SB over Montgomery Avenue; I-95 SB over Palmer Street; I-95 SB off-ramp (Ramp B); I-95 SB off-ramp to Aramingo Avenue SB and Delaware Avenue (Ramp B Spur); I-95 SB on-ramp (Ramp D); and Aramingo Avenue SB over Ramp B, Girard Avenue and Spur A. Also included will be completion of the surface street tie-ins with the southbound ramp terminals and the construction of associated retaining walls and sound barrier walls. Aramingo Ave. will be reconstructed between Delaware Ave. and Cumberland St. Additionally, a shared-use path will be constructed under the viaduct between Girard Avenue Interchange and Lehigh Avenue with connections to bike lanes on Richmond Street, Aramingo Avenue, and Lehigh Avenue. A shared-use path will be constructed along Aramingo Avenue from Delaware Avenue to York Street. A majority of the utility impacts will be limited to areas of work along the surface street crossing under I-95. This project is being coordinated with the I-95 Section CPR and Section AFC projects from a construction letting and geographical location standpoint.

An investment of more than \$2.7 billion will provide for the repair, reconstruction and restoration of I-95, a major facility built in the 1960's which runs through Bucks, Philadelphia, and Delaware Counties in the DVRPC region. Current construction efforts in Philadelphia, are addressing critical repairs on aging bridges and interchanges, and improve traffic flow, along the approximately eight miles of I-95 between I-676/Vine Street and Cottman Avenue (Sector A), by adding new ramps and creating a more consistent four-lane highway in both directions by eliminating lane-drops and providing continuous lanes connecting the on-off ramps. Appropriate pedestrian, bicycle, and transit facilities may also be expanded depending on the context of the construction section. The reconstruction of I-95 has been broken out to over 20 separate MPMS #'s, some of which appear in the Interstate Management Program, which is strictly for reconstruction components, and some of which appear in the DVRPC Regional TIP. MPMS #'s include: 17821 (Section GIR design: GR0, GR1, GR2, GR3, GR4, GR5, GR6, GR7), 47394 (Section CPR design: CP1, CP2), 47811 (Section BSR design: BS1, BS2, BS3), 47812 (Section BRI design: BR0, BR2, BR3), 47813 (Section AFC design: AF1, AF2), 79683 (Section CP1 construction), 79685 (Section CP2 construction), 79686 (Section GR1 construction), 79826 (Section GR3 construction), 79827 (Section GR4 construction), 79828 (Section GR5 construction), 79903 (Section BR0 construction), 79904 (Section BR2 construction), 79905 (Section BR3 construction), 79908 (Section BS1 construction), 79910 (Section BS2 construction), 79911 (Section AF1 construction), 79912 (Section AF2 construction), 80094 (Section GR0 construction), 83640 (Section GR2 construction), 87784 (Section BS3 construction), 98207 (I95 Congestion Management), 103553 (Section GR6 Construction), 103554 (Section GR7 construction), 103555 (Section GR8 construction), 102309 (I95 Corridor Drainage). Please refer to the DVRPC I-95 Reconstruction Project in Philadelphia Roadmap in the TIP for additional information about the various sections and corresponding MPMS#'s as well as notations on future and previous projects which may not currently be active and do not appear in the IMP or TIP.

This project is integral to the Delaware Valley Freight Corridor Initiative. Project CMP (Congestion Management Process) commitments include strategies such as improvements for transit users, bicyclists, pedestrians and drivers on the existing road network (operations). See DVRPC's 2007 and 2010 annual memoranda on supplemental CMP strategies for details related to this project. A final alternative for bridge rehabilitation or replacement is determined upon federal national Environmental Policy Act (NEPA) or state Categorical Exclusion clearance. Related sections of I-95 Reconstruction: MPMS #'s 17821, 80094, 79685, 83640, 79826, 79828, 102305.

		TIP Program Years (\$ 000)												
Phase	Fund	FY2023	FY2024	FY2025	FY2026	FY2027	FY2028	FY2029	FY2030	FY2031	FY2032	FY2033	FY2034	
CON	NHPP-IM	13,068												
		13,068	0	0	0	0	0	0	0	0	0	0	0	
		Total FY2023-2026			13,068	Total FY2027-2030				0	Total FY2031-2034			0

DVRPC FY2023-2026 TIP for PA

Pennsylvania - Interstate Management Program

Philadelphia

MPMS# 79828 *I-95 Northbound: Race - Shackamaxon (GR5)*

LIMITS: Race Street to Shackamaxon Street

No Let Date

MUNICIPALITIES: Philadelphia City

MRPID:65

IMPROVEMENT: Intersection/Interchange Improvements

FC: 11

AQ Code:2035M

PLAN CENTER: Metropolitan Center

IPD: 14

PROJECT MANAGER: EE/E. Elbich

CMP: Major SOV Capacity

CMP Subcorridor(s): 4B

This project is a component of the Statewide Interstate Management Program (IMP) and is a construction breakout of Section GIR (MPMS #17821). This project provides for the reconstruction, rehabilitation, and widening of I-95 northbound between Race Street and Shackamaxon Street, and the reconstruction of the northern Vine Street interchange ramp connection with I-95. This project includes rehabilitation, deck replacement, demolition, and replacement of eight bridges.

An investment of more than \$2.7 billion will provide for the repair, reconstruction and restoration of I-95, a major facility built in the 1960's which runs through Bucks, Philadelphia, and Delaware Counties in the DVRPC region. Current construction efforts in Philadelphia, are addressing critical repairs on aging bridges and interchanges, and improve traffic flow, along the approximately eight miles of I-95 between I-676/Vine Street and Cottman Avenue (Sector A), by adding new ramps and creating a more consistent four-lane highway in both directions by eliminating lane-drops and providing continuous lanes connecting the on-off ramps. Appropriate pedestrian, bicycle, and transit facilities may also be expanded depending on the context of the construction section. The reconstruction of I-95 has been broken out to over 20 separate MPMS #'s, some of which appear in the Interstate Management Program, which is strictly for reconstruction components, and some of which appear in the DVRPC Regional TIP. MPMS #'s include: 17821 (Section GIR design: GR0, GR1, GR2, GR3, GR4, GR5, GR6, GR7), 47394 (Section CPR design: CP1, CP2), 47811 (Section BSR design: BS1, BS2, BS3), 47812 (Section BRI design: BR0, BR2, BR3), 47813 (Section AFC design: AF1, AF2), 79683 (Section CP1 construction), 79685 (Section CP2 construction), 79686 (Section GR1 construction), 79826 (Section GR3 construction), 79827 (Section GR4 construction), 79828 (Section GR5 construction), 79903 (Section BR0 construction), 79904 (Section BR2 construction), 79905 (Section BR3 construction), 79908 (Section BS1 construction), 79910 (Section BS2 construction), 79911 (Section AF1 construction), 79912 (Section AF2 construction), 80094 (Section GR0 construction), 83640 (Section GR2 construction), 87784 (Section BS3 construction), 98207 (I95 Congestion Management), 103553 (Section GR6 Construction), 103554 (Section GR7 construction), 103555 (Section GR8 construction), 102309 (I95 Corridor Drainage). Please refer to the DVRPC I-95 Reconstruction Project in Philadelphia Roadmap in the TIP for additional information about the various sections and corresponding MPMS#'s as well as notations on future and previous projects which may not currently be active and do not appear in the IMP or TIP.

This project is integral to the Delaware Valley Freight Corridor Initiative. Project CMP (Congestion Management Process) commitments include strategies such as improvements for transit users, bicyclists, pedestrians and drivers on the existing road network (operations). See DVRPC's 2007 and 2010 annual memoranda on supplemental CMP strategies for details related to this project. A final alternative for bridge rehabilitation or replacement is determined upon federal national Environmental Policy Act (NEPA) or state Categorical Exclusion clearance. Related sections of I-95 Reconstruction: MPMS #'s 17821, 80094, 79685, 83640, 79826, 79828, 102305.

		TIP Program Years (\$ 000)											
Phase	Fund	FY2023	FY2024	FY2025	FY2026	FY2027	FY2028	FY2029	FY2030	FY2031	FY2032	FY2033	FY2034
ROW	NHPP-IM	2,115											
ROW	581-IM	235											
ROW	NHPP-IM		2,115										
ROW	581-IM		235										
UTL	185-IM		8,441										
UTL	185-IM			8,441									
CON	NHPP-IM				5,092								
CON	BRIP-IM				34,908								
CON	NFP-IM					60,360							
CON	NHPP-IM						40,000						
CON	NHPP-IM							40,000					
CON	NHPP-IM								40,000				
CON	NHPP-IM									85,701			
		2,350	10,791	8,441	40,000	60,360	40,000	40,000	40,000	85,701	0	0	0
		Total FY2023-2026			61,582	Total FY2027-2030			180,360	Total FY2031-2034			85,701

Pennsylvania - Interstate Management Program

Philadelphia

MPMS# 79904 *I-95: Betsy Ross Section Ramps A&B (BR2)*

LIMITS: Wheatshaf Lane to Orthodox St. Crossing

No Let Date

MUNICIPALITIES: Philadelphia City

MRPID:65

IMPROVEMENT: Intersection/Interchange Improvements

FC: 11

AQ Code:R1

PLAN CENTER:

IPD: 20

PROJECT MANAGER: Harold Windisch ADE CONSTR

CMP: Major SOV Capacity

CMP Subcorridor(s): 4B

This project is a component of the Statewide Interstate Management Program (IMP) and is a construction breakout of Section BRI (MPMS #47812).

The BR2 section is a part of the I-95 Reconstruction, I-95 Section BRI, also known as the Betsy Ross Interchange. Section BR2 project includes construction for the replacements of both Ramp A and Ramp B structures in the Betsy Ross Interchange including approach roadway work in the City of Philadelphia. See MPMS #47812 for an overall description of the SR 95 Section BRI section.

An investment of more than \$2.7 billion will provide for the repair, reconstruction and restoration of I-95, a major facility built in the 1960's which runs through Bucks, Philadelphia, and Delaware Counties in the DVRPC region. Current construction efforts in Philadelphia, are addressing critical repairs on aging bridges and interchanges, and improve traffic flow, along the approximately eight miles of I-95 between I-676/Vine Street and Cottman Avenue (Sector A), by adding new ramps and creating a more consistent four-lane highway in both directions by eliminating lane-drops and providing continuous lanes connecting the on-off ramps. Appropriate pedestrian, bicycle, and transit facilities may also be expanded depending on the context of the construction section. The reconstruction of I-95 has been broken out to over 20 separate MPMS #'s, some of which appear in the Interstate Management Program, which is strictly for reconstruction components, and some of which appear in the DVRPC Regional TIP. MPMS #'s include: 17821 (Section GIR design: GR0, GR1, GR2, GR3, GR4, GR5, GR6, GR7), 47394 (Section CPR design: CP1, CP2), 47811 (Section BSR design: BS1, BS2, BS3), 47812 (Section BRI design:BR0, BR2, BR3), 47813 (Section AFC design: AF1, AF2), 79683 (Section CP1 construction), 79685 (Section CP2 construction), 79686 (Section GR1 construction), 79826 (Section GR3 construction), 79827 (Section GR4 construction), 79828 (Section GR5 construction), 79903 (Section BR0 construction), 79904 (Section BR2 construction), 79905 (Section BR3 construction), 79908 (Section BS1 construction), 79910 (Section BS2 construction), 79911 (Section AF 1 construction), 79912 (Section AF2 construction), 80094 (Section GR0 construction), 83640 (Section GR2 construction), 87784 (Section BS3 construction), 98207 (I95 Congestion Management), 103553 (Section GR6 Construction), 103554 (Section GR7 construction), 103555 (Section GR8 construction), 102309 (I95 Corridor Drainage). Please refer to the DVRPC I-95 Reconstruction Project in Philadelphia Roadmap in the TIP for additional information about the various sections and corresponding MPMS#'s as well as notations on future and previous projects which may not currently be active and do not appear in the IMP or TIP.

This project is integral to the Delaware Valley Freight Corridors Initiative. Project CMP (Congestion Management Process) commitments include strategies such as improvements for transit users, bicyclists, pedestrians, and drivers on the existing road network (operations). See DVRPC's 2007 and 2010 annual memoranda on supplemental CMP strategies for details related to this project. Related sections of I-95 Reconstruction: MPMS #'s 47812, 79903, 79904, 79905, 103559, 103560 and 103561.

TIP Program Years (\$ 000)

Phase	Fund	FY2023	FY2024	FY2025	FY2026	FY2027	FY2028	FY2029	FY2030	FY2031	FY2032	FY2033	FY2034
CON	NHPP-IM	15,000											
CON	NHPP-IM		12,626										
		15,000	12,626	0	0	0	0	0	0	0	0	0	0
		Total FY2023-2026		27,626		Total FY2027-2030				0			
						Total FY2031-2034				0			

Pennsylvania - Interstate Management Program

Philadelphia

MPMS# 79905 I-95: Betsy Ross Mainline Northbound (BR3)

LIMITS: Wheetshaeaf Lane to I-95 north of Margaret St.

No Let Date

MUNICIPALITIES: Philadelphia City

MRPID:65

IMPROVEMENT: Intersection/Interchange Improvements

FC: 11

AQ Code:2035M

PLAN CENTER:

IPD: 20

PROJECT MANAGER: AECOM/P. Shultes

CMP: Major SOV Capacity

CMP Subcorridor(s): 4B

This project is a component of the Statewide Interstate Management Program (IMP) and is a construction breakout of Section BRI (MPMS #47812).

Project includes the northbound mainline construction from Wheetshaeaf Lane to SR 0095 north of Margaret St. This contract will also remove the northbound collector/distributor and ramp which connects I-95 northbound and the Betsy Ross Bridge to the local street system (Aramingo Avenue, Harbison Avenue, Tacony Street and Bridge Street). This traffic will be redirected to the ramps completed in the I-95 BR0 (MPMS #79903) project. This includes the demolition and/or replacement of numerous structures including new bridges for I-95 northbound over Frankford Creek, Orthodox Street and Margaret Street. Pearce Street will be relocated out from underneath I-95. As a result of the collector/distributor ramp removal, a new ramp will be constructed to connect the Betsy Ross Bridge to I-95 NB (Ramp GH). Ramp G and Ramp H structures will also be replaced. A significant portion of the northbound mainline that currently is supported on structure will be removed and replaced with a geotechnically supported pavement using compensating fill and/or column supported embankment. This will eliminate approximately 176,500 SF of SD bridge deck. The existing noisewall in this section will be replaced. Local street landscaping and lighting will be incorporated in consultation with the Bridesburg community. PWD facility upgrades are anticipated to carry a portion of the mainline drainage to the Frankford Creek Outfall near Bridge Street. See MPMS #47812 for an overall description of the SR 95 Section BRI section.

An investment of more than \$2.7 billion will provide for the repair, reconstruction and restoration of I-95, a major facility built in the 1960's which runs through Bucks, Philadelphia, and Delaware Counties in the DVRPC region. Current construction efforts in Philadelphia, are addressing critical repairs on aging bridges and interchanges, and improve traffic flow, along the approximately eight miles of I-95 between I-676/Vine Street and Cottman Avenue (Sector A), by adding new ramps and creating a more consistent four-lane highway in both directions by eliminating lane-drops and providing continuous lanes connecting the on-off ramps. Appropriate pedestrian, bicycle, and transit facilities may also be expanded depending on the context of the construction section. The reconstruction of I-95 has been broken out to over 20 separate MPMS #'s, some of which appear in the Interstate Management Program, which is strictly for reconstruction components, and some of which appear in the DVRPC Regional TIP. MPMS #'s include: 17821 (Section GIR design: GR0, GR1, GR2, GR3, GR4, GR5, GR6, GR7), 47394 (Section CPR design: CP1, CP2), 47811 (Section BSR design: BS1, BS2, BS3), 47812 (Section BRI design:BR0, BR2, BR3), 47813 (Section AFC design: AF1, AF2), 79683 (Section CP1 construction), 79685 (Section CP2 construction), 79686 (Section GR1 construction), 79826 (Section GR3 construction), 79827 (Section GR4 construction), 79828 (Section GR5 construction), 79903 (Section BR0 construction), 79904 (Section BR2 construction), 79905 (Section BR3 construction), 79908 (Section BS1 construction), 79910 (Section BS2 construction), 79911 (Section AF1 construction), 79912 (Section AF2 construction), 80094 (Section GR0 construction), 83640 (Section GR2 construction), 87784 (Section BS3 construction), 98207 (I95 Congestion Management), 103553 (Section GR6 Construction), 103554 (Section GR7 construction), 103555 (Section GR8 construction), 102309 (I95 Corridor Drainage). Please refer to the DVRPC I-95 Reconstruction Project in Philadelphia Roadmap in the TIP for additional information about the various sections and corresponding MPMS#'s as well as notations on future and previous projects which may not currently be active and do not appear in the IMP or TIP.

This project is integral to the Delaware Valley Freight Corridors Initiative. Project CMP (Congestion Management Process) commitments include strategies such as improvements for transit users, bicyclists, pedestrians, and drivers on the existing road network (operations). See DVRPC's 2007 and 2010 annual memoranda on supplemental CMP strategies for details related to this project. A final alternative for bridge rehabilitation or replacement is determined upon federal National Environmental Policy Act (NEPA) or state Categorical Exclusion clearance. Related sections of I-95 Reconstruction: MPMS #'s 47812, 79903, 79904, 79905, 103559, 103560 and 103561.

		TIP Program Years (\$ 000)											
Phase	Fund	FY2023	FY2024	FY2025	FY2026	FY2027	FY2028	FY2029	FY2030	FY2031	FY2032	FY2033	FY2034
ROW	581-IM		2,000										
ROW	185-IM		4,000										
UTL	581-IM	1,000											
CON	NHPP-IM		20,343										
CON	BRIP-IM		14,657										
CON	NHPP-IM			22,105									
CON	BRIP-IM			7,895									
CON	NHPP-IM				10,000								
CON	BRIP-IM				20,000								
CON	NHPP-IM					30,000							
CON	NHPP-IM						30,000						

DVRPC FY2023-2026 TIP for PA

Pennsylvania - Interstate Management Program

Philadelphia

CON NHPP-IM					30,000							
CON NHPP-IM						30,000						
CON NHPP-IM								65,800				
	1,000	41,000	30,000	30,000	30,000	30,000	30,000	30,000	65,800	0	0	0
Total FY2023-2026			102,000		Total FY2027-2030	120,000			Total FY2031-2034	65,800		

MPMS# 79908 I-95: Kennedy to Levick (Section BS1) (IMP)

LIMITS: Kennedy Street to Levick Street, and the southbound I-95 off-ramp at the Bridge Street interchange

No Let Date

MUNICIPALITIES: Philadelphia City

MRPID:65

IMPROVEMENT: Intersection/Interchange Improvements

FC: 11

AQ Code:2025M

PLAN CENTER:

IPD: 21

PROJECT MANAGER: Harold Windisch ADE CONSTR

CMP: Major SOV Capacity

CMP Subcorridor(s): 4B

This project is a component of the Statewide Interstate Management Program (IMP) and is a construction breakout of Section BSR (MPMS #47811).

The BS1 section is a part of the I-95 Reconstruction, SR 0095 Section BSR, also known as the Bridge Street Ramps section. This phase of SR 95 Section BSR covers the I-95 reconstruction from Carver Street to Levick Street, including work to:

- Reconstruct northbound and southbound I-95 (four lanes in each direction) from Carver Street to Levick Street;
 - Replace the bridges that carry I-95 over Comly Street, and Van Kirk Street; and
 - Modify the traffic signals at Tacony Street and Van Kirk Street, Tacony Street and Comly Street, and Tacony Street and Newman Co. driveway.
- This project will add interconnection to the traffic signals on Tacony Street from Fraley Street to Barnett Street and on New State Street from Elbridge Street to Milnor Street.

For an overall description of the SR 95 Section BSR section, see MPMS #47811.

An investment of more than \$2.7 billion will provide for the repair, reconstruction and restoration of I-95, a major facility built in the 1960's which runs through Bucks, Philadelphia, and Delaware Counties in the DVRPC region. Current construction efforts in Philadelphia, are addressing critical repairs on aging bridges and interchanges, and improve traffic flow, along the approximately eight miles of I-95 between I-676/Vine Street and Cottman Avenue (Sector A), by adding new ramps and creating a more consistent four-lane highway in both directions by eliminating lane-drops and providing continuous lanes connecting the on-off ramps. Appropriate pedestrian, bicycle, and transit facilities may also be expanded depending on the context of the construction section. The reconstruction of I-95 has been broken out to over 20 separate MPMS #'s, some of which appear in the Interstate Management Program, which is strictly for reconstruction components, and some of which appear in the DVRPC Regional TIP. MPMS #'s include: 17821 (Section GIR design: GR0, GR1, GR2, GR3, GR4, GR5, GR6, GR7), 47394 (Section CPR design: CP1, CP2), 47811 (Section BSR design: BS1, BS2, BS3), 47812 (Section BRI design:BR0, BR2, BR3), 47813 (Section AFC design: AF1, AF2), 79683 (Section CP1 construction), 79685 (Section CP2 construction), 79686 (Section GR1 construction), 79826 (Section GR3 construction), 79827 (Section GR4 construction), 79828 (Section GR5 construction), 79903 (Section BR0 construction), 79904 (Section BR2 construction), 79905 (Section BR3 construction), 79908 (Section BS1 construction), 79910 (Section BS2 construction), 79911 (Section AF 1 construction), 79912 (Section AF2 construction), 80094 (Section GR0 construction), 83640 (Section GR2 construction), 87784 (Section BS3 construction), 98207 (I95 Congestion Management), 103553 (Section GR6 Construction), 103554 (Section GR7 construction), 103555 (Section GR8 construction), 102309 (I95 Corridor Drainage). Please refer to the DVRPC I-95 Reconstruction Project in Philadelphia Roadmap in the TIP for additional information about the various sections and corresponding MPMS#'s as well as notations on future and previous projects which may not currently be active and do not appear in the IMP or TIP.

This project is integral to the Delaware Valley Freight Corridors Initiative. Project CMP (Congestion Management Process) commitments include strategies such as improvements for transit users, bicyclists, pedestrians, and drivers on the existing road network (operations). See DVRPC's 2007 and 2010 annual memoranda on supplemental CMP strategies for details related to this project. Related sections of I-95 Reconstruction: MPMS #'s 47811, 79908, 79910, 87784, 103562, 103563 and 103564.

		TIP Program Years (\$ 000)											
Phase	Fund	FY2023	FY2024	FY2025	FY2026	FY2027	FY2028	FY2029	FY2030	FY2031	FY2032	FY2033	FY2034
CON	NHPP-IM	9,297											
		9,297	0	0	0	0	0	0	0	0	0	0	0
		Total FY2023-2026		9,297		Total FY2027-2030			0		Total FY2031-2034		0

Pennsylvania - Interstate Management Program

Philadelphia

MPMS# 79910 I-95: Margaret to Kennedy (Section BS2) (IMP)

LIMITS: Margaret to Kennedy

No Let Date

MUNICIPALITIES: Philadelphia City

MRPID:65

IMPROVEMENT: Intersection/Interchange Improvements

FC: 11

AQ Code:2035M

PLAN CENTER:

IPD: 21

PROJECT MANAGER: AECOM/P. Shultes

CMP: Major SOV Capacity

CMP Subcorridor(s): 4B

This project is a component of the Statewide Interstate Management Program (IMP) and is a construction breakout from Section BSR (MPMS #47811).

This phase of I-95 Section BSR covers the I-95 reconstruction from just north of Margaret Street to Carver Street, and the removal of the northbound I-95 on-ramp at Bridge Street and the removal of the southbound I-95 off-ramp at James Street which will be relocated to the new intersection of Tacony Street and Delaware Avenue in the City of Philadelphia. This project includes work to: (1) reconstruct northbound and southbound I-95 (four lanes in each direction) from just north of Margaret Street to Carver Street. The viaduct that carries I-95 over Tacony Street and Bridge Street will be replaced; (2) removal of the Bridge Street northbound on-ramp and the James Street southbound off-ramp; (3) reconstruct Tacony Street from Aramingo Avenue to Levick Street; (4) modify the traffic signals at Bridge and Tacony Streets, Bridge and James Streets, Tacony and Fraley Streets, and construct a new traffic signal at Tacony Street and Delaware Avenue; reconstruct Bridge Street to reduce the street width and add pedestrian and bicyclist safety features, and construct stormwater outfall(s) to Old Frankford Creek. For an overall description of SR 95 Section BSR section see MPMS #47811.

An investment of more than \$2.7 billion will provide for the repair, reconstruction and restoration of I-95, a major facility built in the 1960's which runs through Bucks, Philadelphia, and Delaware Counties in the DVRPC region. Current construction efforts in Philadelphia, are addressing critical repairs on aging bridges and interchanges, and improve traffic flow, along the approximately eight miles of I-95 between I-676/Vine Street and Cottman Avenue (Sector A), by adding new ramps and creating a more consistent four-lane highway in both directions by eliminating lane-drops and providing continuous lanes connecting the on-off ramps. Appropriate pedestrian, bicycle, and transit facilities may also be expanded depending on the context of the construction section. The reconstruction of I-95 has been broken out to over 20 separate MPMS #'s, some of which appear in the Interstate Management Program, which is strictly for reconstruction components, and some of which appear in the DVRPC Regional TIP. MPMS #'s include: 17821 (Section GIR design: GR0, GR1, GR2, GR3, GR4, GR5, GR6, GR7), 47394 (Section CPR design: CP1, CP2), 47811 (Section BSR design: BS1, BS2, BS3), 47812 (Section BRI design: BR0, BR2, BR3), 47813 (Section AFC design: AF1, AF2), 79683 (Section CP1 construction), 79685 (Section CP2 construction), 79686 (Section GR1 construction), 79826 (Section GR3 construction), 79827 (Section GR4 construction), 79828 (Section GR5 construction), 79903 (Section BR0 construction), 79904 (Section BR2 construction), 79905 (Section BR3 construction), 79908 (Section BS1 construction), 79910 (Section BS2 construction), 79911 (Section AF1 construction), 79912 (Section AF2 construction), 80094 (Section GR0 construction), 83640 (Section GR2 construction), 87784 (Section BS3 construction), 98207 (I95 Congestion Management), 103553 (Section GR6 Construction), 103554 (Section GR7 construction), 103555 (Section GR8 construction), 102309 (I95 Corridor Drainage). Please refer to the DVRPC I-95 Reconstruction Project in Philadelphia Roadmap in the TIP for additional information about the various sections and corresponding MPMS#'s as well as notations on future and previous projects which may not currently be active and do not appear in the IMP or TIP.

This project is integral to the Delaware Valley Freight Corridors Initiative. Project CMP (Congestion Management Process) commitments include strategies such as improvements for transit users, bicyclists, pedestrians, and drivers on the existing road network (operations). See DVRPC's 2007 and 2010 annual memoranda on supplemental CMP strategies for details related to this project. A final alternative for bridge rehabilitation or replacement is determined upon federal National Environmental Policy Act (NEPA) or state Categorical Exclusion clearance. Related sections of I-95 Reconstruction: MPMS #'s 47811, 79908, 79910, 87784, 103562, 103563 and 103564.

TIP Program Years (\$ 000)

Phase	Fund	FY2023	FY2024	FY2025	FY2026	FY2027	FY2028	FY2029	FY2030	FY2031	FY2032	FY2033	FY2034
ROW	NHPP-IM	900											
ROW	581-IM	100											
UTL	581-IM	3,000											
UTL	581-IM		3,900										
CON	NHPP-IM	25,000											
CON	NHPP-IM		25,000										
CON	NHPP-IM			30,000									
CON	NHPP-IM				40,000								
CON	NHPP-IM					30,000							
CON	NHPP-IM						30,000						
CON	NHPP-IM							30,000					
CON	NHPP-IM								20,000				

DVRPC FY2023-2026 TIP for PA

Pennsylvania - Interstate Management Program

Philadelphia

29,000	28,900	30,000	40,000	30,000	30,000	30,000	20,000	0	0	0	0
Total FY2023-2026		127,900		Total FY2027-2030		110,000		Total FY2031-2034		0	

MPMS# 79912 I-95: Allegheny Ave and Castor Ave Interchanges connection (AF2)

LIMITS: Philadelphia County

No Let Date

MUNICIPALITIES: Philadelphia City

MRPID:65

IMPROVEMENT: Intersection/Interchange Improvements

FC: 11

AQ Code:2025M

PLAN CENTER:

IPD: 14

PROJECT MANAGER: CH2MHill/P. Conti

CMP: Major SOV Capacity

CMP Subcorridor(s): 4B

This project is a component of the Statewide Interstate Management Program (IMP) and is a construction breakout of AFC (MPMS #47813).

Project includes the local road improvements in support of I-95 AF3 and AF4 (main line I-95). The project will optimize signal timings on the local roadway network including Aramingo Avenue, Allegheny Avenue, and Castor Avenue; pavement rehabilitation and reconstruction on Delaware Avenue between Castor Avenue and Allegheny Avenue; the additional of auxiliary lanes at the intersections of Aramingo and Ontario and Aramingo and Venango; new traffic signals at the intersections of Allegheny/Bath, Castor Avenue/I-95 ramp. New signals are not interconnected. The project will also include improvements to the Philadelphia Water Department Outfalls from I-95 to the Delaware River to accommodate stormwater management for the reconstruction of I-95. New signing, pavement markings, and lighting will be constructed on Allegheny Avenue, Delaware Avenue, and Castor Avenue which will serve as the connection between the split interchanges (NB interchange at Castor Avenue, SB interchange at Allegheny). Sidewalks, where appropriate, will be included on Allegheny, Delaware and Castor Avenue. A multi-use path is proposed on the north side of Castor Avenue that will extend from Richmond Street to Delaware Avenue is proposed as a connection to the east Coast Greenway trail that currently exists along Delaware and Allegheny Avenues.

An investment of more than \$2.7 billion will provide for the repair, reconstruction and restoration of I-95, a major facility built in the 1960's which runs through Bucks, Philadelphia, and Delaware Counties in the DVRPC region. Current construction efforts in Philadelphia, are addressing critical repairs on aging bridges and interchanges, and improve traffic flow, along the approximately eight miles of I-95 between I-676/Vine Street and Cottman Avenue (Sector A), by adding new ramps and creating a more consistent four-lane highway in both directions by eliminating lane-drops and providing continuous lanes connecting the on-off ramps. Appropriate pedestrian, bicycle, and transit facilities may also be expanded depending on the context of the construction section. The reconstruction of I-95 has been broken out to over 20 separate MPMS #'s, some of which appear in the Interstate Management Program, which is strictly for reconstruction components, and some of which appear in the DVRPC Regional TIP. MPMS #'s include: 17821 (Section GIR design: GR0, GR1, GR2, GR3, GR4, GR5, GR6, GR7), 47394 (Section CPR design: CP1, CP2), 47811 (Section BSR design: BS1, BS2, BS3), 47812 (Section BRI design: BR0, BR2, BR3), 47813 (Section AFC design: AF1, AF2), 79683 (Section CP1 construction), 79685 (Section CP2 construction), 79686 (Section GR1 construction), 79826 (Section GR3 construction), 79827 (Section GR4 construction), 79828 (Section GR5 construction), 79903 (Section BR0 construction), 79904 (Section BR2 construction), 79905 (Section BR3 construction), 79908 (Section BS1 construction), 79910 (Section BS2 construction), 79911 (Section AF1 construction), 79912 (Section AF2 construction), 80094 (Section GR0 construction), 83640 (Section GR2 construction), 87784 (Section BS3 construction), 98207 (I95 Congestion Management), 103553 (Section GR6 Construction), 103554 (Section GR7 construction), 103555 (Section GR8 construction), 102309 (I95 Corridor Drainage). Please refer to the DVRPC I-95 Reconstruction Project in Philadelphia Roadmap in the TIP for additional information about the various sections and corresponding MPMS#'s as well as notations on future and previous projects which may not currently be active and do not appear in the IMP or TIP.

This project is integral to the Delaware Valley Freight Corridors Initiative. Project CMP (Congestion Management Process) commitments include strategies such as improvements for transit users, bicyclists, pedestrians, and drivers on the existing road network (operations). See DVRPC's 2007 and 2010 annual memoranda on supplemental CMP strategies for details related to this project.

		TIP Program Years (\$ 000)													
Phase	Fund	FY2023	FY2024	FY2025	FY2026	FY2027	FY2028	FY2029	FY2030	FY2031	FY2032	FY2033	FY2034		
CON	NHPP-IM	8,800													
		8,800	0	0	0	0	0	0	0	0	0	0	0		
Total FY2023-2026		8,800			Total FY2027-2030				0				Total FY2031-2034		0

Pennsylvania - Interstate Management Program

Philadelphia

MPMS# 80014 **I-95: Cottman On-Ramp (C)**

LIMITS: Cottman-Princeton Utility, Philadelphia

No Let Date

MUNICIPALITIES: Philadelphia City

MRPID:65

IMPROVEMENT: Intersection/Interchange Improvements

FC:

AQ Code:S10

PLAN CENTER:

IPD: 21

PROJECT MANAGER: Harold Windisch ADE CONSTR

CMP: Not SOV Capacity Adding

CMP Subcorridor(s): 4B, 5G, 5H

This project is a component of the Statewide Interstate Management Program (IMP) and is a construction breakout of Section CPR (MPMS #47394). This project will construct Ramp F, the southbound I-95 on-ramp from Cottman Avenue.

Utility relocation consists of relocating Philadelphia Water Dept sewer (114"-) main in Wissinoming Street (between Princeton and Bleigh Avenues). Associated roadway work includes pavement reconstruction on: Wissinoming Street, Milnor Street (between New State Rd and Bleigh Avenue) and Bleigh Avenue (between Milnor Street and State Rd). Left turn lanes will be added to SR 73 (New State Road) at Magee Avenue. Additional traffic, bicycle and pedestrian operational improvements will be made on surface streets that are part of the Cottman/Princeton interchange. Additional construction includes 1 retaining wall and traffic signal construction and/or timing modifications at up to 4 locations.

An investment of more than \$2.7 billion will provide for the repair, reconstruction and restoration of I-95, a major facility built in the 1960's which runs through Bucks, Philadelphia, and Delaware Counties in the DVRPC region. Current construction efforts in Philadelphia, are addressing critical repairs on aging bridges and interchanges, and improve traffic flow, along the approximately eight miles of I-95 between I-676/Vine Street and Cottman Avenue (Sector A), by adding new ramps and creating a more consistent four-lane highway in both directions by eliminating lane-drops and providing continuous lanes connecting the on-off ramps. Appropriate pedestrian, bicycle, and transit facilities may also be expanded depending on the context of the construction section. The reconstruction of I-95 has been broken out to over 20 separate MPMS #'s, some of which appear in the Interstate Management Program, which is strictly for reconstruction components, and some of which appear in the DVRPC Regional TIP. MPMS #'s include: 17821 (Section GIR design: GR0, GR1, GR2, GR3, GR4, GR5, GR6, GR7), 47394 (Section CPR design: CP1, CP2), 47811 (Section BSR design: BS1, BS2, BS3), 47812 (Section BRI design:BR0, BR2, BR3), 47813 (Section AFC design: AF1, AF2), 79683 (Section CP1 construction), 79685 (Section CP2 construction), 79686 (Section GR1 construction), 79826 (Section GR3 construction), 79827 (Section GR4 construction), 79828 (Section GR5 construction), 79903 (Section BR0 construction), 79904 (Section BR2 construction), 79905 (Section BR3 construction), 79908 (Section BS1 construction), 79910 (Section BS2 construction), 79911 (Section AF1 construction), 79912 (Section AF2 construction), 80094 (Section GR0 construction), 83640 (Section GR2 construction), 87784 (Section BS3 construction), 98207 (I95 Congestion Management), 103553 (Section GR6 Construction), 103554 (Section GR7 construction), 103555 (Section GR8 construction), 102309 (I95 Corridor Drainage). Please refer to the DVRPC I-95 Reconstruction Project in Philadelphia Roadmap in the TIP for additional information about the various sections and corresponding MPMS#'s as well as notations on future and previous projects which may not currently be active and do not appear in the IMP or TIP.

This project is integral to the Delaware Valley Freight Corridors Initiative. Project CMP (Congestion Management Process) commitments include strategies such as improvements for transit users, bicyclists, pedestrians, and drivers on the existing road network (operations). See DVRPC's 2007 and 2010 annual memoranda on supplemental CMP strategies for details related to this project. Related sections of I-95 Reconstruction: MPMS #'s 47394, 79683 and 79685.

		TIP Program Years (\$ 000)												
Phase	Fund	FY2023	FY2024	FY2025	FY2026	FY2027	FY2028	FY2029	FY2030	FY2031	FY2032	FY2033	FY2034	
CON	NHPP-IM	15,000												
CON	NHPP-IM		15,000											
CON	NHPP-IM			14,000										
		15,000	15,000	14,000	0	0	0	0	0	0	0	0	0	
Total FY2023-2026		44,000			Total FY2027-2030				0	Total FY2031-2034				0

DVRPC FY2023-2026 TIP for PA

Final Version

Pennsylvania - Interstate Management Program

Philadelphia

MPMS# 92289 I-95 Consultant Mgmt

LIMITS: I-95 in Bucks, Delaware, and Philadelphia Counties

No Let Date

MUNICIPALITIES: Various

IMPROVEMENT: Other

FC:

AQ Code:X5

PLAN CENTER:

IPD:

PROJECT MANAGER: EE/E. Elbich

CMP: Not SOV Capacity Adding

Contract to hire a consultant to provide engineering and design assistance to PennDOT to advance necessary projects for I-95 in Bucks, Delaware and Philadelphia Counties.

TIP Program Years (\$ 000)

Phase	Fund	FY2023	FY2024	FY2025	FY2026	FY2027	FY2028	FY2029	FY2030	FY2031	FY2032	FY2033	FY2034
PE	NHPP-IM	1,800											
PE	581-IM	200											
PE	NHPP-IM		1,800										
PE	581-IM		200										
		2,000	2,000	0	0	0	0	0	0	0	0	0	0
		Total FY2023-2026		4,000		Total FY2027-2030				0			
										Total FY2031-2034		0	

DVRPC FY2023-2026 TIP for PA

Pennsylvania - Interstate Management Program

Philadelphia

MPMS# 98207 *I-95 Congestion Management*

LIMITS: I-95 in Bucks, Delaware, and Philadelphia Counties

No Let Date

MUNICIPALITIES: Philadelphia City

IMPROVEMENT: Intersection/Interchange Improvements

FC:

AQ Code:NRS

PLAN CENTER:

IPD: 26

PROJECT MANAGER: EE/E. Elbich

CMP: Not SOV Capacity Adding

CMP Subcorridor(s): 4B

This project is a component of the Statewide Interstate Management Program (IMP) and will provide for Congestion Management Activities related to the reconstruction of I-95 through Bucks, Delaware, and Philadelphia counties. This is to further the ongoing congestion mitigation as the construction activity increases on the corridor. Ongoing mainline work in section BS1 will be followed by upcoming work in sections BS2, GR6, BR3, and AF3, all expected to start in the next five years. Traffic impacts to the mainline are expected throughout the duration of each of those projects. Prior to the COVID-19 pandemic, investment focused on enhancing the capacity of the SEPTA regional rail lines parallel and closest to the I-95 corridor. Improvements included purchase of additional rolling stock and improvements to provide additional parking at regional rail stations. With the decline in regional rail ridership that resulted from the pandemic and public health measures to control it, enhancements to modernize and offer improved customer experience at regional rail stations are vital to entice commuters back to transit services. Continued investments in transit facilities support the broader congestion mitigation strategy for the corridor, including efforts to provide real-time transit and vehicular travel time information on I-95.

An investment of more than \$2.7 billion will provide for the repair, reconstruction and restoration of I-95, a major facility built in the 1960's which runs through Bucks, Philadelphia, and Delaware Counties in the DVRPC region. Current construction efforts in Philadelphia, are addressing critical repairs on aging bridges and interchanges, and improve traffic flow, along the approximately eight miles of I-95 between I-676/Vine Street and Cottman Avenue (Sector A), by adding new ramps and creating a more consistent four-lane highway in both directions by eliminating lane-drops and providing continuous lanes connecting the on-off ramps. Appropriate pedestrian, bicycle, and transit facilities may also be expanded depending on the context of the construction section. The reconstruction of I-95 has been broken out to over 20 separate MPMS #'s, some of which appear in the Interstate Management Program, which is strictly for reconstruction components, and some of which appear in the DVRPC Regional TIP. MPMS #'s include: 17821 (Section GIR design: GR0, GR1, GR2, GR3, GR4, GR5, GR6, GR7), 47394 (Section CPR design: CP1, CP2), 47811 (Section BSR design: BS1, BS2, BS3), 47812 (Section BRI design:BR0, BR2, BR3), 47813 (Section AFC design: AF1, AF2), 79683 (Section CP1 construction), 79685 (Section CP2 construction), 79686 (Section GR1 construction), 79826 (Section GR3 construction), 79827 (Section GR4 construction), 79828 (Section GR5 construction), 79903 (Section BR0 construction), 79904 (Section BR2 construction), 79905 (Section BR3 construction), 79908 (Section BS1 construction), 79910 (Section BS2 construction), 79911 (Section AF1 construction), 79912 (Section AF2 construction), 80094 (Section GR0 construction), 83640 (Section GR2 construction), 87784 (Section BS3 construction), 98207 (I95 Congestion Management), 103553 (Section GR6 Construction), 103554 (Section GR7 construction), 103555 (Section GR8 construction), 102309 (I95 Corridor Drainage). Please refer to the DVRPC I-95 Reconstruction Project in Philadelphia Roadmap in the TIP for additional information about the various sections and corresponding MPMS#'s as well as notations on future and previous projects which may not currently be active and do not appear in the IMP or TIP.

TIP Program Years (\$ 000)

Phase	Fund	FY2023	FY2024	FY2025	FY2026	FY2027	FY2028	FY2029	FY2030	FY2031	FY2032	FY2033	FY2034	
PRA	NHPP-IM	12,100												
PRA	NHPP-IM		12,100											
PRA	NHPP-IM			12,200										
		12,100	12,100	12,200	0	0	0	0	0	0	0	0	0	
		Total FY2023-2026			36,400		Total FY2027-2030			0	Total FY2031-2034			0

DVRPC FY2023-2026 TIP for PA

Pennsylvania - Interstate Management Program

Philadelphia

MPMS# 103553 *I-95 Southbound: Race to Shackamaxon (GR6)*

LIMITS: I-95 Race St to Shackamaxon South

No Let Date

MUNICIPALITIES: Philadelphia City

MRPID:65

IMPROVEMENT: Intersection/Interchange Improvements

FC:

AQ Code:2035M

PLAN CENTER:

IPD: 14

PROJECT MANAGER: EE/E. Elbich

CMP: Minor SOV Capacity

CMP Subcorridor(s): 4B

This project is a component of the Statewide Interstate Management Program (IMP) and is a construction breakout of Section GIR (MPMS #17821). The project provides for the reconstruction, rehabilitation and widening of I-95 southbound between Race Street and Shackamaxon Street and the reconstruction of a portion of the Vine Street interchange ramp connection with I-95. Included in the project are structure rehabilitation, deck replacement, demolition and replacement of nine bridges.

An investment of more than \$2.7 billion will provide for the repair, reconstruction and restoration of I-95, a major facility built in the 1960's which runs through Bucks, Philadelphia, and Delaware Counties in the DVRPC region. Current construction efforts in Philadelphia, are addressing critical repairs on aging bridges and interchanges, and improve traffic flow, along the approximately eight miles of I-95 between I-676/Vine Street and Cottman Avenue (Sector A), by adding new ramps and creating a more consistent four-lane highway in both directions by eliminating lane-drops and providing continuous lanes connecting the on-off ramps. Appropriate pedestrian, bicycle, and transit facilities may also be expanded depending on the context of the construction section. The reconstruction of I-95 has been broken out to over 20 separate MPMS #'s, some of which appear in the Interstate Management Program, which is strictly for reconstruction components, and some of which appear in the DVRPC Regional TIP. MPMS #'s include: 17821 (Section GIR design: GR0, GR1, GR2, GR3, GR4, GR5, GR6, GR7), 47394 (Section CPR design: CP1, CP2), 47811 (Section BSR design: BS1, BS2, BS3), 47812 (Section BRI design: BR0, BR2, BR3), 47813 (Section AFC design: AF1, AF2), 79683 (Section CP1 construction), 79685 (Section CP2 construction), 79686 (Section GR1 construction), 79826 (Section GR3 construction), 79827 (Section GR4 construction), 79828 (Section GR5 construction), 79903 (Section BR0 construction), 79904 (Section BR2 construction), 79905 (Section BR3 construction), 79908 (Section BS1 construction), 79910 (Section BS2 construction), 79911 (Section AF1 construction), 79912 (Section AF2 construction), 80094 (Section GR0 construction), 83640 (Section GR2 construction), 87784 (Section BS3 construction), 98207 (I95 Congestion Management), 103553 (Section GR6 Construction), 103554 (Section GR7 construction), 103555 (Section GR8 construction), 102309 (I95 Corridor Drainage). Please refer to the DVRPC I-95 Reconstruction Project in Philadelphia Roadmap in the TIP for additional information about the various sections and corresponding MPMS#'s as well as notations on future and previous projects which may not currently be active and do not appear in the IMP or TIP.

This project is integral to the Delaware Valley Freight Corridor Initiative. Project CMP (Congestion Management Process) commitments include strategies such as improvements for transit users, bicyclists, pedestrians and drivers on the existing road network (operations). See DVRPC's 2007 and 2010 annual memoranda on supplemental CMP strategies for details related to this project. A final alternative for bridge rehabilitation or replacement is determined upon federal national Environmental Policy Act (NEPA) or state Categorical Exclusion clearance. Related sections of I-95 Reconstruction: MPMS #'s 17821, 80094, 79685, 83640, 79826, 79828, 102305.

TIP Program Years (\$ 000)

Phase	Fund	FY2023	FY2024	FY2025	FY2026	FY2027	FY2028	FY2029	FY2030	FY2031	FY2032	FY2033	FY2034	
ROW	NHPP-IM	9,000												
ROW	581-IM	1,000												
ROW	NHPP-IM		4,500											
ROW	581-IM		500											
UTL	NHPP-IM	4,500												
UTL	581-IM	500												
CON	BRIP-IM	23,478												
CON	BRIP-IM		20,000											
CON	NHPP-IM			30,000										
CON	NHPP-IM				30,000									
CON	NHPP-IM					30,000								
CON	NHPP-IM						30,000							
CON	NHPP-IM							30,000						
CON	NHPP-IM								30,000					
CON	NHPP-IM									37,522				
		38,478	25,000	30,000	30,000	30,000	30,000	30,000	30,000	37,522	0	0	0	
		Total FY2023-2026			123,478		Total FY2027-2030			120,000	Total FY2031-2034			37,522

Pennsylvania - Interstate Management Program

Philadelphia

MPMS# 103555 *I-95 Corridor ITS (GR8)*

LIMITS: I-95 Corridor in the City of Philadelphia

No Let Date

MUNICIPALITIES: Philadelphia City

MRPID:65

IMPROVEMENT: Signal/ITS Improvements

FC:

AQ Code:2035M

PLAN CENTER: Suburban Center

IPD: 30

PROJECT MANAGER: CONSTR

CMP: Minor SOV Capacity

CMP Subcorridor(s): 5G, 5H

Traffic signal interconnection and implementation of ITS devices along the US-1/Roosevelt Boulevard from 9th Street to Woodhaven Road in Philadelphia. ITS devices are used to control the flow of traffic and may include but are not limited to tag readers, CCTV cameras, dynamic/variable message signs (DMS/VMS), and variable speed limit system, which will be installed along the US-1/Roosevelt Boulevard and the roadway section that leads to the I-95 Corridor. Gaps in fiber connectivity will be addressed as necessary.

An investment of more than \$2.7 billion will provide for the repair, reconstruction and restoration of I-95, a major facility built in the 1960's which runs through Bucks, Philadelphia, and Delaware Counties in the DVRPC region. Current construction efforts in Philadelphia, are addressing critical repairs on aging bridges and interchanges, and improve traffic flow, along the approximately eight miles of I-95 between I-676/Vine Street and Cottman Avenue (Sector A), by adding new ramps and creating a more consistent four-lane highway in both directions by eliminating lane-drops and providing continuous lanes connecting the on-off ramps. Appropriate pedestrian, bicycle, and transit facilities may also be expanded depending on the context of the construction section. The reconstruction of I-95 has been broken out to over 20 separate MPMS #'s, some of which appear in the Interstate Management Program, which is strictly for reconstruction components, and some of which appear in the DVRPC Regional TIP. MPMS #'s include: 17821 (Section GIR design: GR0, GR1, GR2, GR3, GR4, GR5, GR6, GR7), 47394 (Section CPR design: CP1, CP2), 47811 (Section BSR design: BS1, BS2, BS3), 47812 (Section BRI design:BR0, BR2, BR3), 47813 (Section AFC design: AF1, AF2), 79683 (Section CP1 construction), 79685 (Section CP2 construction), 79686 (Section GR1 construction), 79826 (Section GR3 construction), 79827 (Section GR4 construction), 79828 (Section GR5 construction), 79903 (Section BR0 construction), 79904 (Section BR2 construction), 79905 (Section BR3 construction), 79908 (Section BS1 construction), 79910 (Section BS2 construction), 79911 (Section AF1 construction), 79912 (Section AF2 construction), 80094 (Section GR0 construction), 83640 (Section GR2 construction), 87784 (Section BS3 construction), 98207 (I95 Congestion Management), 103553 (Section GR6 Construction), 103554 (Section GR7 construction), 103555 (Section GR8 construction), 102309 (I95 Corridor Drainage). Please refer to the DVRPC I-95 Reconstruction Project in Philadelphia Roadmap in the TIP for additional information about the various sections and corresponding MPMS#'s as well as notations on future and previous projects which may not currently be active and do not appear in the IMP or TIP.

TIP Program Years (\$ 000)

Phase	Fund	FY2023	FY2024	FY2025	FY2026	FY2027	FY2028	FY2029	FY2030	FY2031	FY2032	FY2033	FY2034
CON	NHPP-IM	13,000											
CON	NHPP-IM		10,000										
		13,000	10,000	0	0	0	0	0	0	0	0	0	0
		Total FY2023-2026		23,000		Total FY2027-2030				0			
						Total FY2031-2034				0			

DVRPC FY2023-2026 TIP for PA

Pennsylvania - Interstate Management Program

Philadelphia

MPMS# 103556 I-95 ATMS (GR9)

LIMITS: I-95 Corridor

No Let Date

MUNICIPALITIES: Philadelphia City

IMPROVEMENT: Signal/ITS Improvements

FC:

AQ Code:S7

PLAN CENTER:

IPD: 26

PROJECT MANAGER: EE/E. Elbich

CMP: Minor SOV Capacity

CMP Subcorridor(s): 4B

This is a line item for various Active Traffic Management System (ATMS) components, such as Variable Speed Limits, Advanced Signal Systems, and Adaptive Ramp Metering. ATMS will be used to integrate technology to improve the flow of vehicle traffic and improve safety on the I-95 corridor.

An investment of more than \$2.7 billion will provide for the repair, reconstruction and restoration of I-95, a major facility built in the 1960's which runs through Bucks, Philadelphia, and Delaware Counties in the DVRPC region. Current construction efforts in Philadelphia, are addressing critical repairs on aging bridges and interchanges, and improve traffic flow, along the approximately eight miles of I-95 between I-676/Vine Street and Cottman Avenue (Sector A), by adding new ramps and creating a more consistent four-lane highway in both directions by eliminating lane-drops and providing continuous lanes connecting the on-off ramps. Appropriate pedestrian, bicycle, and transit facilities may also be expanded depending on the context of the construction section. The reconstruction of I-95 has been broken out to over 20 separate MPMS #'s, some of which appear in the Interstate Management Program, which is strictly for reconstruction components, and some of which appear in the DVRPC Regional TIP. MPMS #'s include: 17821 (Section GIR design: GR0, GR1, GR2, GR3, GR4, GR5, GR6, GR7), 47394 (Section CPR design: CP1, CP2), 47811 (Section BSR design: BS1, BS2, BS3), 47812 (Section BRI design:BR0, BR2, BR3), 47813 (Section AFC design: AF1, AF2), 79683 (Section CP1 construction), 79685 (Section CP2 construction), 79686 (Section GR1 construction), 79826 (Section GR3 construction), 79827 (Section GR4 construction), 79828 (Section GR5 construction), 79903 (Section BR0 construction), 79904 (Section BR2 construction), 79905 (Section BR3 construction), 79908 (Section BS1 construction), 79910 (Section BS2 construction), 79911 (Section AF1 construction), 79912 (Section AF2 construction), 80094 (Section GR0 construction), 83640 (Section GR2 construction), 87784 (Section BS3 construction), 98207 (I95 Congestion Management), 103553 (Section GR6 Construction), 103554 (Section GR7 construction), 103555 (Section GR8 construction), 102309 (I95 Corridor Drainage). Please refer to the DVRPC I-95 Reconstruction Project in Philadelphia Roadmap in the TIP for additional information about the various sections and corresponding MPMS#'s as well as notations on future and previous projects which may not currently be active and do not appear in the IMP or TIP.

TIP Program Years (\$ 000)

Phase	Fund	FY2023	FY2024	FY2025	FY2026	FY2027	FY2028	FY2029	FY2030	FY2031	FY2032	FY2033	FY2034		
UTL	581-IM							1,400							
CON	NHPP-IM								40,000						
CON	NHPP-IM									36,000					
		0	0	0	0	0	0	1,400	40,000	36,000	0	0	0		
		Total FY2023-2026				0	Total FY2027-2030				41,400	Total FY2031-2034			36,000

DVRPC FY2023-2026 TIP for PA

Final Version

Pennsylvania - Interstate Management Program

Philadelphia

MPMS# 103557 *I-95 Northbound: Ann Street to W heatsheaf Lane (AF3)*

LIMITS: I-95 Allegheny Ave. South of Frankford Creek

No Let Date

MUNICIPALITIES: Philadelphia City

MRPID:65

IMPROVEMENT: Intersection/Interchange Improvements

FC:

AQ Code:2035M

PLAN CENTER:

IPD: 20

PROJECT MANAGER: CH2MHill/P. Conti

CMP: Major SOV Capacity

CMP Subcorridor(s): 4B

This project is a component of the Statewide Interstate Management Program (IMP) and is a construction breakout of AFC (MPMS #47813).

Project will reconstruct I-95 from Clearfield Street to W heatsheaf Lane, including reconstruction of the NB off-ramp to the Betsy Ross Bridge over Castor Avenue, reconstruction of the NB on-ramp from Castor Avenue, removal of the NB off-ramp at Westmoreland Street, and construction of a new NB off-ramp at Castor Avenue. I-95 traffic will be maintained on 3 lanes NB and 3 lanes SB during peak hours.

This project includes work on the following bridge structures:

*Westmoreland Viaduct (I-95 NB from Allegheny Avenue to Tioga Street) - Extend viaduct over playground from Westmoreland Street to Allegheny Avenue. Widen and Reconstruct existing NB Structure from Westmoreland Street to Tioga Street.

*I-95 NB over Venango Street - Total Replacement

*I-95 NB over Castor Avenue - Total Replacement

*I-95 NB over Richmond Street - Total Replacement

*I-95 NB over W heatsheaf Lane - Total Replacement

*Betsy Ross Ramp A Viaduct (NB) - Total Replacement

Also included is construction of associated retaining walls, sound barrier walls, and roadway on fill sections. The proposed I-95 will have 5 lanes northbound (4 through lanes and a collector-distributor lane) and 5 lanes southbound (4 through lanes and a collector-distributor lane). New ramp movements are not being created, but are being relocated. The existing disjointed interchange will be reconfigured into split interchanges (a NB interchange at Castor Avenue, and a SB interchange at Allegheny Avenue).

An investment of more than \$2.7 billion will provide for the repair, reconstruction and restoration of I-95, a major facility built in the 1960's which runs through Bucks, Philadelphia, and Delaware Counties in the DVRPC region. Current construction efforts in Philadelphia, are addressing critical repairs on aging bridges and interchanges, and improve traffic flow, along the approximately eight miles of I-95 between I-676/Vine Street and Cottman Avenue (Sector A), by adding new ramps and creating a more consistent four-lane highway in both directions by eliminating lane-drops and providing continuous lanes connecting the on-off ramps. Appropriate pedestrian, bicycle, and transit facilities may also be expanded depending on the context of the construction section. The reconstruction of I-95 has been broken out to over 20 separate MPMS #'s, some of which appear in the Interstate Management Program, which is strictly for reconstruction components, and some of which appear in the DVRPC Regional TIP. MPMS #'s include: 17821 (Section GIR design: GR0, GR1, GR2, GR3, GR4, GR5, GR6, GR7), 47394 (Section CPR design: CP1, CP2), 47811 (Section BSR design: BS1, BS2, BS3), 47812 (Section BRI design:BR0, BR2, BR3), 47813 (Section AFC design: AF1, AF2), 79683 (Section CP1 construction), 79685 (Section CP2 construction), 79686 (Section GR1 construction), 79826 (Section GR3 construction), 79827 (Section GR4 construction), 79828 (Section GR5 construction), 79903 (Section BR0 construction), 79904 (Section BR2 construction), 79905 (Section BR3 construction), 79908 (Section BS1 construction), 79910 (Section BS2 construction), 79911 (Section AF1 construction), 79912 (Section AF2 construction), 80094 (Section GR0 construction), 83640 (Section GR2 construction), 87784 (Section BS3 construction), 98207 (I95 Congestion Management), 103553 (Section GR6 Construction), 103554 (Section GR7 construction), 103555 (Section GR8 construction), 102309 (I95 Corridor Drainage). Please refer to the DVRPC I-95 Reconstruction Project in Philadelphia Roadmap in the TIP for additional information about the various sections and corresponding MPMS#'s as well as notations on future and previous projects which may not currently be active and do not appear in the IMP or TIP.

This project is integral to the Delaware Valley Freight Corridors Initiative.

TIP Program Years (\$ 000)

Phase	Fund	FY2023	FY2024	FY2025	FY2026	FY2027	FY2028	FY2029	FY2030	FY2031	FY2032	FY2033	FY2034
ROW	NHPP-IM	4,050											
ROW	581-IM	450											
ROW	NHPP-IM		4,050										
ROW	581-IM		450										
UTL	NHPP-IM	1,890											
UTL	581-IM	210											
CON	NHPP-IM			35,000									
CON	NHPP-IM				30,000								
CON	NHPP-IM					30,000							
CON	NHPP-IM						30,000						

DVRPC FY2023-2026 TIP for PA

Pennsylvania - Interstate Management Program

Philadelphia														
CON	NHPP-IM									30,000				
CON	NHPP-IM										30,000			
CON	NHPP-IM											36,000		
		6,600	4,500	35,000	30,000	30,000	30,000	30,000	30,000	30,000	36,000	0	0	0
		Total FY2023-2026			76,100	Total FY2027-2030			120,000	Total FY2031-2034			36,000	

Pennsylvania - Interstate Management Program

Philadelphia

MPMS# 103558 *I-95 Southbound: Ann Street to Wheitsheaf Lane (AF4)*

LIMITS: I-95 Ann St to Frankford Crk Interchange SB

No Let Date

MUNICIPALITIES: Philadelphia City

MRPID:65

IMPROVEMENT: Intersection/Interchange Improvements

FC:

AQ Code:2035M

PLAN CENTER:

IPD: 20

PROJECT MANAGER: CH2MHill/P. Conti

CMP: Major SOV Capacity

CMP Subcorridor(s): 4B

This project is a component of the Statewide Interstate Management Program (IMP) and is a construction breakout of AFC (MPMS #47813).

Project will reconstruct I-95 from Clearfield Street to Wheitsheaf Lane, including reconstruction of the SB on-ramp and SB off-ramp at Allegheny Avenue. I-95 traffic will be maintained on 3 lanes NB and 3 lanes SB during peak hours.

This project includes work on the following bridge structures:

*Westmoreland Viaduct (I-95 SB from Allegheny Avenue to Tioga Street) - Extend viaduct over playground from Westmoreland Street to Allegheny Avenue. Replace the existing SB Structure from Westmoreland Street to Tioga Street.

*I-95 SB over Venango Street - Total Replacement

*I-95 SB over Castor Avenue - Total Replacement

*I-95 SB over Richmond Street - Total Replacement

*I-95 SB over Wheitsheaf Lane - Total Replacement

*Ramp E over playground - New Bridge

Also included is construction of associated retaining walls, sound barrier walls, and roadway on fill sections. The proposed I-95 will have 5 lanes northbound (4 through lanes and a collector-distributor lane) and 5 lanes southbound (4 through lanes and a collector-distributor lane). New ramp movements are not being created, but are being relocated. The existing disjointed interchange will be reconfigured into split interchanges (a NB interchange at Castor Avenue, and a SB interchange at Allegheny Avenue).

An investment of more than \$2.7 billion will provide for the repair, reconstruction and restoration of I-95, a major facility built in the 1960's which runs through Bucks, Philadelphia, and Delaware Counties in the DVRPC region. Current construction efforts in Philadelphia, are addressing critical repairs on aging bridges and interchanges, and improve traffic flow, along the approximately eight miles of I-95 between I-676/Vine Street and Cottman Avenue (Sector A), by adding new ramps and creating a more consistent four-lane highway in both directions by eliminating lane-drops and providing continuous lanes connecting the on-off ramps. Appropriate pedestrian, bicycle, and transit facilities may also be expanded depending on the context of the construction section. The reconstruction of I-95 has been broken out to over 20 separate MPMS #'s, some of which appear in the Interstate Management Program, which is strictly for reconstruction components, and some of which appear in the DVRPC Regional TIP. MPMS #'s include: 17821 (Section GIR design: GR0, GR1, GR2, GR3, GR4, GR5, GR6, GR7), 47394 (Section CPR design: CP1, CP2), 47811 (Section BSR design: BS1, BS2, BS3), 47812 (Section BRI design:BR0, BR2, BR3), 47813 (Section AFC design: AF1, AF2), 79683 (Section CP1 construction), 79685 (Section CP2 construction), 79686 (Section GR1 construction), 79826 (Section GR3 construction), 79827 (Section GR4 construction), 79828 (Section GR5 construction), 79903 (Section BR0 construction), 79904 (Section BR2 construction), 79905 (Section BR3 construction), 79908 (Section BS1 construction), 79910 (Section BS2 construction), 79911 (Section AF1 construction), 79912 (Section AF2 construction), 80094 (Section GR0 construction), 83640 (Section GR2 construction), 87784 (Section BS3 construction), 98207 (I95 Congestion Management), 103553 (Section GR6 Construction), 103554 (Section GR7 construction), 103555 (Section GR8 construction), 102309 (I95 Corridor Drainage). Please refer to the DVRPC I-95 Reconstruction Project in Philadelphia Roadmap in the TIP for additional information about the various sections and corresponding MPMS#'s as well as notations on future and previous projects which may not currently be active and do not appear in the IMP or TIP.

This project is integral to the Delaware Valley Freight Corridors Initiative.

Project CMP (Congestion Management Process) commitments include strategies such as improvements for transit users, bicyclists, pedestrians, and drivers on the existing road network (operations). See DVRPC's 2007 and 2010 annual memoranda on supplemental CMP strategies for details related to this project.

TIP Program Years (\$ 000)

Phase	Fund	FY2023	FY2024	FY2025	FY2026	FY2027	FY2028	FY2029	FY2030	FY2031	FY2032	FY2033	FY2034
ROW	581-IM						600						
UTL	581-IM					600							
CON	NHPP-IM							40,000					
CON	NFP-IM								60,360				
CON	NHPP-IM									99,700			

DVRPC FY2023-2026 TIP for PA

Final Version

Pennsylvania - Interstate Management Program

Philadelphia

	0	0	0	0	600	600	40,000	60,360	99,700	0	0	0
Total FY2023-2026			0		Total FY2027-2030		101,560		Total FY2031-2034		99,700	

Pennsylvania - Interstate Management Program

Philadelphia

MPMS# 103559 I-95: Betsy Ross Mainline Southbound (BR4)

LIMITS: No Let Date
MUNICIPALITIES: Philadelphia City MRPID:65
IMPROVEMENT: Intersection/Interchange Improvements FC: AQ Code:2035M
PLAN CENTER: IPD: 21
PROJECT MANAGER: AECOM/P. Shultes **CMP:** Major SOV Capacity **CMP Subcorridor(s):** 4B

This project is a component of the Statewide Interstate Management Program (IMP) and is a construction breakout of Section BRI (MPMS #47812).

Project includes the southbound mainline construction from W heatsheaf Lane to SR 0095 north of Margaret St. This contract will also remove the southbound collector/distributor and ramp which connects Aramingo Avenue, Harbison Avenue, Tacony Street and Bridge Street to I-95 southbound and the Betsy Ross Bridge. This traffic will be redirected to the ramps completed in the I-95 BR0 (MPMS #79903) project. This includes the demolition and/or replacement of numerous structures including new bridges for I-95 southbound over Frankford Creek, Orthodox Street and Margaret Street. A significant portion of the southbound mainline that currently is supported on structure will be removed and replaced with a geotechnically supported pavement using compensating fill and/or column supported embankment. This will eliminate approximately 176,500 SF of SD bridge deck. The existing Conrail rail siding that services the AdvanSix Chemical plant will be relocated. Local street landscaping and lighting will be incorporated in consultation with the Bridesburg community. PWD facility upgrades are anticipated to carry a portion of the mainline drainage to the Frankford Creek Outfall near Bridge Street. See MPMS #47812 for an overall description of the SR 95 Section BRI section.

An investment of more than \$2.7 billion will provide for the repair, reconstruction and restoration of I-95, a major facility built in the 1960's which runs through Bucks, Philadelphia, and Delaware Counties in the DVRPC region. Current construction efforts in Philadelphia, are addressing critical repairs on aging bridges and interchanges, and improve traffic flow, along the approximately eight miles of I-95 between I-676/Vine Street and Cottman Avenue (Sector A), by adding new ramps and creating a more consistent four-lane highway in both directions by eliminating lane-drops and providing continuous lanes connecting the on-off ramps. Appropriate pedestrian, bicycle, and transit facilities may also be expanded depending on the context of the construction section. The reconstruction of I-95 has been broken out to over 20 separate MPMS #'s, some of which appear in the Interstate Management Program, which is strictly for reconstruction components, and some of which appear in the DVRPC Regional TIP. MPMS #'s include: 17821 (Section GIR design: GR0, GR1, GR2, GR3, GR4, GR5, GR6, GR7), 47394 (Section CPR design: CP1, CP2), 47811 (Section BSR design: BS1, BS2, BS3), 47812 (Section BRI design:BR0, BR2, BR3), 47813 (Section AFC design: AF1, AF2), 79683 (Section CP1 construction), 79685 (Section CP2 construction), 79686 (Section GR1 construction), 79826 (Section GR3 construction), 79827 (Section GR4 construction), 79828 (Section GR5 construction), 79903 (Section BR0 construction), 79904 (Section BR2 construction), 79905 (Section BR3 construction), 79908 (Section BS1 construction), 79910 (Section BS2 construction), 79911 (Section AF1 construction), 79912 (Section AF2 construction), 80094 (Section GR0 construction), 83640 (Section GR2 construction), 87784 (Section BS3 construction), 98207 (I95 Congestion Management), 103553 (Section GR6 Construction), 103554 (Section GR7 construction), 103555 (Section GR8 construction), 102309 (I95 Corridor Drainage). Please refer to the DVRPC I-95 Reconstruction Project in Philadelphia Roadmap in the TIP for additional information about the various sections and corresponding MPMS#'s as well as notations on future and previous projects which may not currently be active and do not appear in the IMP or TIP.

This project is integral to the Delaware Valley Freight Corridors Initiative. Project CMP (Congestion Management Process) commitments include strategies such as improvements for transit users, bicyclists, pedestrians, and drivers on the existing road network (operations). See DVRPC's 2007 and 2010 annual memoranda on supplemental CMP strategies for details related to this project. A final alternative for bridge rehabilitation or replacement is determined upon federal National Environmental Policy Act (NEPA) or state Categorical Exclusion clearance. Related sections of I-95 Reconstruction: MPMS #'s 47812, 79903, 79904, 79905, 103559, 103560 and 103561.

TIP Program Years (\$ 000)

Phase	Fund	FY2023	FY2024	FY2025	FY2026	FY2027	FY2028	FY2029	FY2030	FY2031	FY2032	FY2033	FY2034
UTL	581-IM				600								
CON	NHPP-IM					30,000							
CON	NFP-IM						60,360						
CON	NFP-IM							60,360					
CON	NHPP-IM								39,300				
		0	0	0	600	30,000	60,360	60,360	39,300	0	0	0	0
		Total FY2023-2026			600	Total FY2027-2030			190,020	Total FY2031-2034			0

Pennsylvania - Interstate Management Program

Philadelphia

MPMS# 103560 *I-95: Betsy Ross Section Conrail Bridges (BR5)*

LIMITS: Conrail bridges over I-95, Thompson St, and Ramps A & C

No Let Date

MUNICIPALITIES: Philadelphia City

MRPID:65

IMPROVEMENT: Bridge Repair/Replacement

FC:

AQ Code:S19

PLAN CENTER:

IPD: 20

PROJECT MANAGER: AECOM/P. Shultes

CMP: Not SOV Capacity Adding

CMP Subcorridor(s): 4B

This project is a component of the Statewide Interstate Management Program (IMP) and is a construction breakout of Section BRI (MPMS #47812).

The BR5 section is a part of the I-95 Reconstruction, SR 0095 Section BRI, also known as the Betsy Ross Interchange. The Section BR5 project includes construction for the replacement, removal, or rehabilitation of the Conrail bridges over I-95, Thompson Street, and Ramps A & C, as well as associated track, signal and communication work required.

An investment of more than \$2.7 billion will provide for the repair, reconstruction and restoration of I-95, a major facility built in the 1960's which runs through Bucks, Philadelphia, and Delaware Counties in the DVRPC region. Current construction efforts in Philadelphia, are addressing critical repairs on aging bridges and interchanges, and improve traffic flow, along the approximately eight miles of I-95 between I-676/Vine Street and Cottman Avenue (Sector A), by adding new ramps and creating a more consistent four-lane highway in both directions by eliminating lane-drops and providing continuous lanes connecting the on-off ramps. Appropriate pedestrian, bicycle, and transit facilities may also be expanded depending on the context of the construction section. The reconstruction of I-95 has been broken out to over 20 separate MPMS #'s, some of which appear in the Interstate Management Program, which is strictly for reconstruction components, and some of which appear in the DVRPC Regional TIP. MPMS #'s include: 17821 (Section GIR design: GR0, GR1, GR2, GR3, GR4, GR5, GR6, GR7), 47394 (Section CPR design: CP1, CP2), 47811 (Section BSR design: BS1, BS2, BS3), 47812 (Section BRI design:BR0, BR2, BR3), 47813 (Section AFC design: AF1, AF2), 79683 (Section CP1 construction), 79685 (Section CP2 construction), 79686 (Section GR1 construction), 79826 (Section GR3 construction), 79827 (Section GR4 construction), 79828 (Section GR5 construction), 79903 (Section BR0 construction), 79904 (Section BR2 construction), 79905 (Section BR3 construction), 79908 (Section BS1 construction), 79910 (Section BS2 construction), 79911 (Section AF1 construction), 79912 (Section AF2 construction), 80094 (Section GR0 construction), 83640 (Section GR2 construction), 87784 (Section BS3 construction), 98207 (I95 Congestion Management), 103553 (Section GR6 Construction), 103554 (Section GR7 construction), 103555 (Section GR8 construction), 102309 (I95 Corridor Drainage). Please refer to the DVRPC I-95 Reconstruction Project in Philadelphia Roadmap in the TIP for additional information about the various sections and corresponding MPMS#'s as well as notations on future and previous projects which may not currently be active and do not appear in the IMP or TIP.

This project is integral to the Delaware Valley Freight Corridors Initiative. Project CMP (Congestion Management Process) commitments include strategies such as improvements for transit users, bicyclists, pedestrians, and drivers on the existing road network (operations). See DVRPC's 2007 and 2010 annual memoranda on supplemental CMP strategies for details related to this project. Related sections of I-95 Reconstruction: MPMS #'s 47812, 79903, 79904, 79905, 103559, 103560 and 103561.

		TIP Program Years (\$ 000)											
Phase	Fund	FY2023	FY2024	FY2025	FY2026	FY2027	FY2028	FY2029	FY2030	FY2031	FY2032	FY2033	FY2034
ROW	581-IM				2,200								
UTL	581-IM			1,500									
CON	NHPP-IM					23,000							
CON	NHPP-IM						23,000						
		0	0	1,500	2,200	23,000	23,000	0	0	0	0	0	0
		Total FY2023-2026			3,700	Total FY2027-2030			46,000	Total FY2031-2034			0

DVRPC FY2023-2026 TIP for PA

Pennsylvania - Interstate Management Program

Philadelphia

MPMS# 103561 *I-95: Betsy Ross Interchange Drainage (BR6)*

LIMITS: In the City of Philadelphia

No Let Date

MUNICIPALITIES: Philadelphia City

MRPID:65

IMPROVEMENT: Intersection/Interchange Improvements

FC:

AQ Code:S2

PLAN CENTER:

IPD: 14

PROJECT MANAGER: AECOM/P. Shultes

CMP: Not SOV Capacity Adding

CMP Subcorridor(s): 4B

This project is a component of the Statewide Interstate Management Program (IMP) and is a construction breakout of Section BRI (MPMS #47812).

The BR6 section is a part of the I-95 Reconstruction, SR 0095 Section BRI, also known as the Betsy Ross Interchange section. This phase of SR 95 Section BRI is for drainage and stormwater management improvements to comply with Philadelphia Water Department requirements. This section includes additional stormwater outfalls to Frankford Creek as may become necessary.

For an overall description of the SR 95 Section BRI section, see MPMS #47812.

An investment of more than \$2.7 billion will provide for the repair, reconstruction and restoration of I-95, a major facility built in the 1960's which runs through Bucks, Philadelphia, and Delaware Counties in the DVRPC region. Current construction efforts in Philadelphia, are addressing critical repairs on aging bridges and interchanges, and improve traffic flow, along the approximately eight miles of I-95 between I-676/Vine Street and Cottman Avenue (Sector A), by adding new ramps and creating a more consistent four-lane highway in both directions by eliminating lane-drops and providing continuous lanes connecting the on-off ramps. Appropriate pedestrian, bicycle, and transit facilities may also be expanded depending on the context of the construction section. The reconstruction of I-95 has been broken out to over 20 separate MPMS #'s, some of which appear in the Interstate Management Program, which is strictly for reconstruction components, and some of which appear in the DVRPC Regional TIP. MPMS #'s include: 17821 (Section GIR design: GR0, GR1, GR2, GR3, GR4, GR5, GR6, GR7), 47394 (Section CPR design: CP1, CP2), 47811 (Section BSR design: BS1, BS2, BS3), 47812 (Section BRI design:BR0, BR2, BR3), 47813 (Section AFC design: AF1, AF2), 79683 (Section CP1 construction), 79685 (Section CP2 construction), 79686 (Section GR1 construction), 79826 (Section GR3 construction), 79827 (Section GR4 construction), 79828 (Section GR5 construction), 79903 (Section BR0 construction), 79904 (Section BR2 construction), 79905 (Section BR3 construction), 79908 (Section BS1 construction), 79910 (Section BS2 construction), 79911 (Section AF1 construction), 79912 (Section AF2 construction), 80094 (Section GR0 construction), 83640 (Section GR2 construction), 87784 (Section BS3 construction), 98207 (I95 Congestion Management), 103553 (Section GR6 Construction), 103554 (Section GR7 construction), 103555 (Section GR8 construction), 102309 (I95 Corridor Drainage). Please refer to the DVRPC I-95 Reconstruction Project in Philadelphia Roadmap in the TIP for additional information about the various sections and corresponding MPMS#'s as well as notations on future and previous projects which may not currently be active and do not appear in the IMP or TIP.

This project is integral to the Delaware Valley Freight Corridors Initiative. Project CMP (Congestion Management Process) commitments include strategies such as improvements for transit users, bicyclists, pedestrians, and drivers on the existing road network (operations). See DVRPC's 2007 and 2010 annual memoranda on supplemental CMP strategies for details related to this project. Related sections of I-95 Reconstruction: MPMS #'s 47812, 79903, 79904, 79905, 103559, 103560 and 115687.

		TIP Program Years (\$ 000)											
Phase	Fund	FY2023	FY2024	FY2025	FY2026	FY2027	FY2028	FY2029	FY2030	FY2031	FY2032	FY2033	FY2034
CON	NHPP-IM	0	0	0	0	0	8,100	0	0	0	0	0	0
		Total FY2023-2026				Total FY2027-2030				Total FY2031-2034			
		0				8,100				0			

DVRPC FY2023-2026 TIP for PA

Final Version

Pennsylvania - Interstate Management Program

Philadelphia

MPMS# 107709 *I-95 Bridge Repairs (95/MB4)*

LIMITS: I-95 Corridor

No Let Date

MUNICIPALITIES: Philadelphia City

IMPROVEMENT: Bridge Repair/Replacement

FC:

AQ Code:S19

PLAN CENTER:

IPD: 23

PROJECT MANAGER: HNTB/N.Velaga

CMP: Not SOV Capacity Adding

The I-95 Section MB4 project includes the repair of 12 structures along the I-95 corridor including 2 structures in Bucks County, 2 in Delaware County and 8 in Philadelphia. Typical repairs include replacement/repair of leaking deck joints, rehabilitation of bearings, repair of structure drainage features, replace under bridge lighting, substructure concrete repair, beam end repairs and deck overlay to extend the life of these structures by a minimum of 15 years. Additionally, this project includes repair or replacement of high mast lighting poles on I-95 located near the Philadelphia Airport. 10 of the 12 structures will require additional repairs such as substructure concrete and beam repairs, replacements of leaking deck expansion joints and frozen sliding plate bearing.

A final alternative for bridge rehabilitation or replacement is determined upon federal National Environmental Policy Act (NEPA) or state Categorical Exclusion clearance.

		TIP Program Years (\$ 000)												
Phase	Fund	FY2023	FY2024	FY2025	FY2026	FY2027	FY2028	FY2029	FY2030	FY2031	FY2032	FY2033	FY2034	
CON	NHPP-IM	4,590												
CON	185-IM	510												
		5,100	0	0	0	0	0	0	0	0	0	0	0	
		Total FY2023-2026			5,100	Total FY2027-2030				0	Total FY2031-2034			0

MPMS# 112299 *I-76: Rte 1- I 676 Paving/Guiderail*

LIMITS: Route 1 to I-676

No Let Date

MUNICIPALITIES: Philadelphia City

MRPID:TBD

IMPROVEMENT: Roadway Rehabilitation

FC:

AQ Code:S10

PLAN CENTER:

IPD:

PROJECT MANAGER: Plans/S. Hasan

CMP: Not SOV Capacity Adding

Pavement preservation and guiderail upgrades on I-76 (Schuylkill Expressway) from Route 1 to I-676 (Vine St. Expressway) in the City of Philadelphia, Philadelphia County.

		TIP Program Years (\$ 000)												
Phase	Fund	FY2023	FY2024	FY2025	FY2026	FY2027	FY2028	FY2029	FY2030	FY2031	FY2032	FY2033	FY2034	
CON	NHPP-IM	20,000												
CON	NHPP-IM		20,575											
		20,000	20,575	0	0	0	0	0	0	0	0	0	0	
		Total FY2023-2026			40,575	Total FY2027-2030				0	Total FY2031-2034			0

DVRPC FY2023-2026 TIP for PA

Final Version

Pennsylvania - Interstate Management Program

Philadelphia

MPMS# 114876 Studies Line Item

LIMITS: City of Philadelphia

No Let Date

MUNICIPALITIES: Philadelphia City

IMPROVEMENT: Other

FC:

AQ Code:X1

PLAN CENTER:

IPD:

PROJECT MANAGER: Chuck Davies ADE Design

CMP: Not Yet Determined

This Line Item sets aside funding to address the following studies that will be addressed:

113762 Broad Street Interchange

This work is the planning and project development activities for the given limits on the I-95 mainline at the Interchange (SR 8001) with Broad Street (SR 0611) from the northern approach to the Girard Point Bridge to Lawrence Street in the City of Philadelphia that will have been identified as integral to the reconstruction of the I-95 mainline in the (MPMS 104243) I-95 Conceptual Study. That study has established limits of design and construction sections, determined a sequence of delivery based on site and asset conditions as well as related issues on a corridor level. This project will be more specific and detailed analysis and project development of a preferred alternative of what will ultimately lead to preliminary engineering and environmental clearance.

113763 Walt Whitman Bridge Interchange

This work is the planning and project development activities for the given limits on the I-95 mainline from Lawrence Street to Snyder Avenue at the Walt Whitman Interchange (SR 8003) with I-76 in the City of Philadelphia that will have been identified as integral to the reconstruction of the I-95 mainline in the (MPMS 104243) I-95 Conceptual Study. That study has established limits of design and construction sections, determined a sequence of delivery based on site and asset conditions as well as related issues on a corridor level. This project will be more specific and detailed analysis and project development of a preferred alternative of what will ultimately lead to preliminary engineering and environmental clearance.

113764 Penn's Landing Interchange

This work is the planning and project development activities for the given limits on the I-95 mainline from Snyder Avenue to Spring Garden Street at the Penn's Landing Interchange (SR 8007) with Christopher Columbus Boulevard (SR 2001) in the City of Philadelphia that will have been identified as integral to the reconstruction of the I-95 mainline in the (MPMS 104243) I-95 Conceptual Study. That study has established limits of design and construction sections, determined a sequence of delivery based on site and asset conditions as well as related issues on a corridor level. This project will be more specific and detailed analysis and project development of a preferred alternative of what will ultimately lead to preliminary engineering and environmental clearance.

113765 Christopher Columbus Boulevard Offline

This work is the planning and project development activities for the given limits on Christopher Columbus Boulevard (SR 2001) from Spring Garden Street to Oregon Avenue and selected local connecting streets in the City of Philadelphia that will have been identified as integral to the reconstruction of the I-95 mainline in the (MPMS 104243) I-95 Conceptual Study. That study has established limits of design and construction sections, determined a sequence of delivery based on site and asset conditions as well as related issues on a corridor level. This project will be more specific and detailed analysis and project development of a preferred alternative of what will ultimately lead to preliminary engineering and environmental clearance.

TIP Program Years (\$ 000)

Phase	Fund	FY2023	FY2024	FY2025	FY2026	FY2027	FY2028	FY2029	FY2030	FY2031	FY2032	FY2033	FY2034	
STUD	NHPP-IM	2,000												
STUD	NHPP-IM		2,000											
STUD	NHPP-IM			2,000										
STUD	NHPP-IM				2,000									
		2,000	2,000	2,000	2,000	0	0	0	0	0	0	0	0	
		Total FY2023-2026			8,000	Total FY2027-2030				0	Total FY2031-2034			0

Pennsylvania - Interstate Management Program

Philadelphia

MPMS# 115687 *I-95: Allegheny & Castor Ave Int.*

LIMITS: Philadelphia County

No Let Date

MUNICIPALITIES: Philadelphia City

IMPROVEMENT: Other

FC:

AQ Code:2025M

PLAN CENTER:

IPD:

PROJECT MANAGER: CH2MHill/P. Conti

CMP: Major SOV Capacity

This project is for the ROW acquisition and separation out from the parent project (MPMS #79912) of four (4) commercial parcels. The separation of the commercial properties was done so that the ROW clearance for MPMS #79912 could be given and the project could be advertised. The project was then on hold until the commercial parcels are fully acquired before issuing ROW clearance for MPMS #115687.

This project is a component of the Statewide Interstate Management Program (IMP) and is a construction breakout of AFC (MPMS #47813).

The project includes the local road improvements in support of I-95 AF3 and AF4 (main line I-95). The project will optimize signal timings on the local roadway network including Aramingo Avenue, Allegheny Avenue, and Castor Avenue; pavement rehabilitation and reconstruction on Delaware Avenue between Castor Avenue and Allegheny Avenue; the additional of auxiliary lanes at the intersections of Aramingo and Ontario and Aramingo and Venango; new traffic signals at the intersections of Allegheny/Bath, Castor Avenue/I-95 ramp. New signals are not interconnected. The project will also include improvements to the Philadelphia Water Department Outfalls from I-95 to the Delaware River to accommodate stormwater management for the reconstruction of I-95. New signing, pavement markings, and lighting will be constructed on Allegheny Avenue, Delaware Avenue, and Castor Avenue which will serve as the connection between the split interchanges (NB interchange at Castor Avenue, SB interchange at Allegheny). Sidewalks will be included on Allegheny, Delaware and Castor and Bicycle Facilities will be improved along Castor Avenue.

An investment of more than \$2.7 billion will provide for the repair, reconstruction and restoration of I-95, a major facility built in the 1960's which runs through Bucks, Philadelphia, and Delaware Counties in the DVRPC region. Current construction efforts in Philadelphia, are addressing critical repairs on aging bridges and interchanges, and improve traffic flow, along the approximately eight miles of I-95 between I-676/Vine Street and Cottman Avenue (Sector A), by adding new ramps and creating a more consistent four-lane highway in both directions by eliminating lane-drops and providing continuous lanes connecting the on-off ramps. Appropriate pedestrian, bicycle, and transit facilities may also be expanded depending on the context of the construction section. The reconstruction of I-95 has been broken out to over 20 separate MPMS #'s, some of which appear in the Interstate Management Program, which is strictly for reconstruction components, and some of which appear in the DVRPC Regional TIP. MPMS #'s include: 17821 (Section GIR design: GR0, GR1, GR2, GR3, GR4, GR5, GR6, GR7), 47394 (Section CPR design: CP1, CP2), 47811 (Section BSR design: BS1, BS2, BS3), 47812 (Section BRI design: BR0, BR2, BR3), 47813 (Section AFC design: AF1, AF2), 79683 (Section CP1 construction), 79685 (Section CP2 construction), 79686 (Section GR1 construction), 79826 (Section GR3 construction), 79827 (Section GR4 construction), 79828 (Section GR5 construction), 79903 (Section BR0 construction), 79904 (Section BR2 construction), 79905 (Section BR3 construction), 79908 (Section BS1 construction), 79910 (Section BS2 construction), 79911 (Section AF1 construction), 79912 (Section AF2 construction), 80094 (Section GR0 construction), 83640 (Section GR2 construction), 87784 (Section BS3 construction), 98207 (I95 Congestion Management), 103553 (Section GR6 Construction), 103554 (Section GR7 construction), 103555 (Section GR8 construction), 102309 (I95 Corridor Drainage). Please refer to the DVRPC I-95 Reconstruction Project in Philadelphia Roadmap in the TIP for additional information about the various sections and corresponding MPMS#'s as well as notations on future and previous projects which may not currently be active and do not appear in the IMP or TIP.

This project is integral to the Delaware Valley Freight Corridors Initiative. Project CMP (Congestion Management Process) commitments include strategies such as improvements for transit users, bicyclists, pedestrians, and drivers on the existing road network (operations). See DVRPC's 2007 and 2010 annual memoranda on supplemental CMP strategies for details related to this project.

		TIP Program Years (\$ 000)												
Phase	Fund	FY2023	FY2024	FY2025	FY2026	FY2027	FY2028	FY2029	FY2030	FY2031	FY2032	FY2033	FY2034	
ROW	NHPP-IM	15,000												
ROW	NHPP-IM		20,000											
ROW	NHPP-IM			10,000										
		15,000	20,000	10,000	0	0	0	0	0	0	0	0	0	
		Total FY2023-2026			45,000	Total FY2027-2030				0	Total FY2031-2034			0

DVRPC FY2023-2026 TIP for PA

Final Version

Pennsylvania - Interstate Management Program

Philadelphia

MPMS# 115805 *I-95 Brdg Rehab: Island Ave-Phila Navy Yard*

LIMITS: I-95 between Island Avenue and Phila. Navy Yard

No Let Date

MUNICIPALITIES: Philadelphia City

IMPROVEMENT: Bridge Repair/Replacement

FC:

AQ Code:S19

PLAN CENTER:

IPD:

PROJECT MANAGER: HNTB/N. Velaga

CMP: Not SOV Capacity Adding

The purpose of this project is to perform comprehensive bridge rehabilitation activities on twenty bridges carrying Interstate 95 between Island Avenue and the Philadelphia Navy Yard in Philadelphia, PA. This is roughly a 5 mile stretch which includes the Girard Point Bridge (Interstate 95 over the Schuylkill River) and the approach structures to the bridge including mainline Interstate 95 bridges and on and off ramps. The rehabilitation will increase the remaining service life of the structures and will provide an overall NBIS bridge condition rating of "good". The bridge rehabilitation will include the following: latex modified concrete deck overlays, painting of structural steel, steel repairs, jacking and bearing repairs and replacements, substructure repairs (including the installation of a fender system on Pier 8 of the Girard Point Bridge, presently there is none provided) and joint replacement and repairs.

		TIP Program Years (\$ 000)											
Phase	Fund	FY2023	FY2024	FY2025	FY2026	FY2027	FY2028	FY2029	FY2030	FY2031	FY2032	FY2033	FY2034
CON	MBP3-IM			125,000									
CON	MBP3-IM				125,000								
CON	MBP3-IM					125,000							
CON	MBP3-IM						125,000						
		0	0	125,000	125,000	125,000	125,000	0	0	0	0	0	0
	Total FY2023-2026			250,000		Total FY2027-2030	250,000	250,000		Total FY2031-2034		0	0

MPMS# 116391 *I-95 Bridge Rehabilitations*

New

I-95 Bridge Rehabilitations

LIMITS:

No Let Date

MUNICIPALITIES: Philadelphia City

IMPROVEMENT: Bridge Repair/Replacement

FC:

AQ Code:S19

PLAN CENTER:

IPD:

PROJECT MANAGER: HNTB/N. Velaga

CMP: Not SOV Capacity Adding

The 95-MB5 Bridge Rehabilitation project will consist of repairs to structures on I-95 mainline and ramps in the City of Philadelphia between Penn's Landing and Broad Street. Typical construction activities will include deck repairs, replacement and/or elimination of expansion deck joints with link slabs, replacement and/or repair of bearings and bearing pedestals, substructure concrete repairs, beam end repairs, and painting of structural steel. The proposed improvements will keep the bridges in "Fair" condition extending their service life. In addition, select overhead sign structures will be replaced and select integral steel box girder pier caps will be rehabilitated on interstates within District 6.

		TIP Program Years (\$ 000)											
Phase	Fund	FY2023	FY2024	FY2025	FY2026	FY2027	FY2028	FY2029	FY2030	FY2031	FY2032	FY2033	FY2034
CON	185-IM				15,000								
CON	185-IM					17,000							
		0	0	0	15,000	17,000	0	0	0	0	0	0	0
	Total FY2023-2026			15,000		Total FY2027-2030	17,000	17,000		Total FY2031-2034		0	0

Total For Philadelphia	2023	2024	2025	2026	2023-2026	2027-2030	2031-2034
	\$247,793	\$245,892	\$345,441	\$325,800	\$1,164,926	\$1,319,440	\$360,723

This Page Intentionally Left Blank